Meeting of the Central Valley Flood Protection Board September 27, 2019

Permit Staff Report

California Department of Transportation Cosumnes River Bridge Replacements, Sacramento County

1.0 - ITEM

Consider approval of Permit No. 19431. (Attachment A)

2.0 - APPLICANT

California Department of Transportation. (Caltrans)

3.0 - PROJECT LOCATION

The project is located where State Route (SR) 99 crosses the Cosumnes River Designated Floodway (DF), approximately 1.6 miles south of the Grant Line Road Overcrossing, about 2.5 miles south of the City of Elk Grove. (Cosumnes River, Sacramento County, Attachment B)

4.0 - PROJECT DESCRIPTION

Caltrans proposes to:

- Remove four (4) existing bridge structures within the Cosumnes River DF: two

 (2) bridges span the main channel at Post Mile (PM) 8.4 (Bridge Nos. 24-0020R and 24-0020L) and two (2) bridges span the overflow channel at PM 7.9. (Bridge Nos. 24-0021R and 24-0021L); and
- 2. Construct two new bridge structures (Cosumnes River Bridge Nos. 24-0391 and 24-0390).

<u>5.0 – AUTHORITY OF THE BOARD</u>

California Water Code § 8534, 8590 – 8610.5, and 8700 – 8710

California Code of Regulations, Title 23, Division 1 (Title 23):

- § 6, Need for a Permit
- § 13.3, Consent Calendar
- § 107, Permitted Uses in Designated Floodways
- § 112, Streams Regulated and Nonpermissible Work Periods
- § 121, Erosion Control
- § 128, Bridges

6.0 - PROJECT ANALYSIS

The Cosumnes River is listed as a regulated stream in Title 23, Section 112, Table 8.1. There are no levees along the Cosumnes River in the project area. The Cosumnes River DF was adopted by the Board on March 22, 1974.

The existing four (4) bridge structures to be replaced were originally constructed in 1958 (Permit No. 2404) and then widened in 1993 (Permit No. 15887).

- Bridge No. 24-0020R crosses the main channel and is 660.8 feet long, 42 feet wide, 22-span bridge with pier walls on reinforced concrete (RC) pile cap on timber piles.
- Bridge 24-0020L also crosses the main channel and is 658.2 feet long, 38 feet wide, 22-span bridge with pier walls on reinforced concrete (RC) pile cap on timber piles.
- Bridge No. 24-0021R crosses the Cosumnes River overflow channel and is a 639.8 feet long, 42-feet wide, 25-span bridge that is constructed with continuous reinforced concrete slab on RC piles/bents.
- Bridge No. 24-0021L also crosses the river's overflow channel and is a 639.8 feet long, 32.2 feet wide, 25-span bridge with continuous RC slab on RC pile/bents.

The existing four bridges are thought to be seismically and structurally deficient for rehabilitation. In addition, the two south-bound Cosumnes River bridges (Br No. 24-0020L and 24-0021L) have sub-standard freeway/expressway bridge shoulder widths. The new bridges will meet current Caltrans Bridge Design Standards and all applicable Title 23 Standards.

The proposed work consists of:

1. Constructing two new bridge structures:

- Bridge No. 24-0391 will cross the main channel and will be a 697 feet long, 117.5 feet wide, 5-span precast, pre-stressed wide flange girder bridge on seated abutments on piles; and
- Bridge No. 24-0390 will cross the overflow channel and will be a 665 feet long, 117.5 feet wide, 6-span precast, pre-stressed wide flange girder bridge on seated abutments on piles.
- Both new bridges will have piers that will consist of five—5-foot diameter concrete columns on 7-foot diameter case-in-drilled-hole (CIDH) piles.
- 2. Removing the existing four bridge structures;
- Constructing two temporary bridges adjacent to the existing Bridges (Nos. 24-0020R and 24-0021R) to accommodate traffic during construction of the new bridges, which is expected to last approximately four (4) years; and
- 4. Placing rock slope protection at all four abutments for scour protection.

<u>6.1 – Hydraulic Analysis</u>

A hydraulic analysis was performed to assess the potential hydraulic impacts due to the proposed bridges. The one-dimensional U.S. Army Corps of Engineers (USACE) Hydrologic Engineering Center-River Analysis System (HEC-RAS) program was used to assess the impacts. All elevations reflect the North American Vertical Datum 1988 (NAVD 88). The analysis was done using the Board adopted design flow of 81,000 cubic feet-per-second (cfs) for the Cosumnes River DF. The DF design water surface elevation (DWSE) at the existing bridges was computed to be 44.58 feet and the proposed soffit elevations in the main and overflow channels for the new bridges will be 50.2 feet and 50.1 feet, respectively. This provides 5.62 feet of flowage clearance in the main channel and 5.52 feet of clearance in the overflow channel. The hydraulic analysis indicates there will be a slight rise in water surface elevation upstream of the bridges (0.01 feet) and a slight decrease in stream velocity (0.01 feet-per-second (fps)) due to the reduction of the number of bridge spans and piers within the channels. The impact is considered an insignificant impact to the existing hydraulics of the Cosumnes River DF.

The analysis also considered the hydraulic impacts from the two temporary bridges that will be installed within the floodway adjacent to the existing bridges for approximately four (4) years. The analysis (see attachment D) determined that the temporary bridges would increase the water surface elevation upstream of the bridges a maximum of 0.03 feet, which is also considered to be insignificant. The temporary bridges will be completely removed from the floodway following the completion of the project.

Caltrans also evaluated a peak flow of 93,000 cfs that was recorded during the 1997

flood that inundated parts of SR-99 in the Cosumnes River floodplain. The peak water surface elevation for that event was determined to be 44.92 feet. Even with this higher flow the bottom members of the proposed bridges will be 5.28 feet and 5.18 feet above the water surface elevation in the main channel and the overflow channels, respectively. The proposed project is not expected to result in any adverse hydraulic impacts to the Cosumnes River DF.

6.2 - Geotechnical Analysis

There are no levees associated with this project; therefore, a geotechnical analysis was not required for this review.

7.0 – AGENCY COMMENTS AND ENDORSEMENTS

The comments and endorsements associated with this project, from all pertinent agencies, are shown below:

- There are no Local Maintaining Agencies in the project area.
- The USACE Sacramento District Engineer has no comments or recommendations regarding flood control because the proposed work does not affect a federally constructed project.

8.0 - CEQA ANALYSIS

The Board, as a responsible agency under CEQA, has reviewed the Initial Study/Negative Declaration (IS/ND) (SCH No. 2019039070, May 2019), and proposed avoidance and minimization measures for the Cosumnes River Bridge Replacement Project, prepared by the lead agency, Caltrans. These documents, including project design, may be viewed or downloaded from the Central Valley Flood Protection Board website at http://cvfpb.ca.gov/event/august-2019-regular-business-meeting/ under a link for this agenda item. The documents are also available for review in hard copy at the Board and Caltrans' offices.

Caltrans determined that the Cosumnes River Bridge Replacement Project would not have a significant effect on the environment and filed a Notice of Determination with the State Clearinghouse on May 22, 2019. Caltrans incorporated avoidance and minimization measures into the project plans to avoid significant adverse impacts. These avoidance and minimization measures are included in Caltrans' adopted IS/ND,

and address impacts to wetlands/waters and biological resources (migratory birds, bats, Swainson's Hawks, Giant Garter Snake, Vernal Pool Fairy Shrimp, Valley Elderberry Longhorn Beetle, and Central Valley Steelhead). The avoidance and minimization measures are further described in Caltrans' adopted IS/ND.

The Board, as a responsible agency, is responsible for mitigating and avoiding only the direct and indirect environmental effects of those parts of the project which it decides to carry out, finance, or approve (CEQA Guidelines § 15096(g); Public Resources Code § 21002.1(d)). The Board's responsibility under CEQA is limited to imposing conditions or mitigation related to effects on the State Plan of Flood Control.

In accordance with CEQA Guidelines § 15096, Board staff independently reviewed Caltrans' IS/ND, and finds the environmental documents prepared by the lead agency adequately address hydrology impacts, including potential flood risk, for the Board's approval of Permit No. 19431 to authorize work to replace four bridge structures, which is within the Board's responsibility as it relates to effects on the State's flood control system.

In accordance with CEQA Guidelines § 15096(f) and (g), staff recommends that the Board make responsible agency findings that approval of Permit No. 19431 will not result in any significant adverse impacts related to flood risk. The project will not adversely impact the State Plan of Flood Control; therefore, no additional mitigation measures within the Board's jurisdiction are required.

The documents and other materials which constitute the record of the Board's proceedings in this matter are in the custody of the Executive Officer, Central Valley Flood Protection Board, 3310 El Camino Ave., Suite 170, Sacramento, California 95821.

9.0 – CA WATER CODE SECTION 8610.5 AND OTHER CONSIDERATIONS

California Water Code Section 8610.5 (c) provides that the Board shall consider all the following matters, if applicable:

1. Evidence that the Board admits into its record from any party, state or local public agency, or nongovernmental organization with expertise in flood or flood plain management:

Staff requests that the Board consider this staff report, any attachments and materials to which the report refers, and any evidence submitted to it prior to or at the hearing.

The best available science that relate to the scientific issues presented by the executive officer, legal counsel, the Department of Water Resources or other parties that raise credible scientific issues.

The accepted industry standards of hydrology and hydraulics for the work proposed under this permit as regulated by Title 23 have been applied to the review of this permit. The one-dimensional HEC-RAS program was used to assess the hydraulic impacts and the analysis was done using the Board adopted design flow and the recorded 1997 peak flow discharge for the Cosumnes River DF. The analysis indicated a slight rise in water surface elevation of 0.01 feet upstream of the bridges and a slight decrease of 0.01 fps in stream velocity, which is considered an insignificant impact. With the incorporation of avoidance and minimization measures into project design, no significant environmental effects were identified.

3. Effects of the decision on facilities of the State Plan of Flood Control (SPFC).

The proposed bridge will have no adverse effects on facilities of the SPFC as the project is located where there are no SPFC facilities. The closest SPFC facilities are the levees of the Sacramento River, which are approximately 10 miles west and downstream of the proposed project.

4. Effects of reasonably projected future events, including, but not limited to, changes in hydrology, climate, and development within the applicable watershed:

The proposed bridges have a similar configuration as the existing bridges and do not significantly change the current hydraulic conditions. Replacing the existing bridges with new structures will improve the hydraulic conditions of the Cosumnes River DF by increasing the flow area under the bridges. The 1997 peak flows, which are higher than the DF flows, were also considered and there is still adequate clearance between the bottom members of the bridges and the DWSE. The new bridges will meet current Caltrans Bridge Design Standards along with improving traffic safety and will remedy the structural and seismic deficiencies of the existing bridges. Therefore, there are no expected adverse effects to the proposed project from reasonably projected future events.

<u>10.0 – STAFF RECOMMENDATION</u>

Adopt:

CEQA finding: The Board, acting as a responsible agency under CEQA, has
independently reviewed and considered the environmental documents prepared
for the project. Approving Permit 19431 will not result in any significant adverse
impacts related to flood risk and no additional mitigation measures within the
Board's jurisdiction are required;

Approve:

• Encroachment Permit No. 19431 in substantially the form provided in Attachment A; and,

Direct:

 The Executive Officer to take the necessary actions to execute the permit and file a CEQA Notice of Determination with the State Clearinghouse.

11.0 – LIST OF ATTACHMENTS

- A. Draft Permit No. 19431
- B. Location Maps and Photos
- C. Project Drawings
- D. Hydraulic Profile Information

Reviewers:

Design Review: Mauricio Meza, Permitting Section Staff

Environmental Review: Jennifer Stewart, Senior Environmental Scientist Document Review: Gary W. Lemon, P.E., Permitting Section Chief

Michael C. Wright, P.E., Chief Engineer

Legal Review: Sarah Backus, Staff Counsel

DRAFT

STATE OF CALIFORNIA THE RESOURCES AGENCY

THE CENTRAL VALLEY FLOOD PROTECTION BOARD

PERMIT NO. 19431 BD

This Permit is issued to:

California Department of Transportation 703 B Street Marysville, California 95901

To remove four (4) bridge structures on State Route 99 over the Cosumnes River Designated Floodway, Cosumnes River Bridges (Br Nos. 24-0020R/L) and Cosumnes River Overflow Bridges (Br Nos. 24-0021R/L); and construct two (2) new bridge structures (Cosumnes River Bridge Nos. 24-0391 and 24-0390).

The project is located where State Route (SR) 99 crosses the Cosumnes River Designated Floodway (DF), approximately 1.6 miles south of the Grant Line Road Overcrossing, about 2.5 miles south of the City of Elk Grove, at 38.35216°N -121.34028°W, Cosumnes River, Sacramento County.

NOTE: Special Conditions have been incorporated herein which may place limitations on and/or require modification of your proposed project as described above.

(SEAL)

Dated:	
	Executive Officer

GENERAL CONDITIONS:

ONE: This permit is issued under the provisions of Sections 8700 – 8723 of the Water Code.

TWO: Only work described in the subject application is authorized hereby.

THREE: This permit does not grant a right to use or construct works on land owned by the Sacramento and San Joaquin Drainage District or on any other land.

FOUR: The approved work shall be accomplished under the direction and supervision of the State Department of Water Resources, and the permittee shall conform to all requirements of the Department and The Central Valley Flood Protection Board.

FIVE: Unless the work herein contemplated shall have been commenced within one year after issuance of this permit, the Board reserves the right to change any conditions in this permit as may be consistent with current flood control standards and policies of The Central Valley Flood Protection Board.

SIX: This permit shall remain in effect until revoked. In the event any conditions in this permit are not complied with, it may be revoked on 15 days' notice.

SEVEN: It is understood and agreed to by the permittee that the start of any work under this permit shall constitute an acceptance of the conditions in this permit and an agreement to perform work in accordance therewith.

EIGHT: This permit does not establish any precedent with respect to any other application received by The Central Valley Flood Protection Board.

NINE: The permittee shall, when required by law, secure the written order or consent from all other public agencies having jurisdiction.

TEN: The permittee is responsible for all personal liability and property damage which may arise out of failure on the permittee's part to perform the obligations under this permit. If any claim of liability is made against the State of California, or any departments thereof, the United States of America, a local district or other maintaining agencies and the officers, agents or employees thereof, the permittee shall defend and shall hold each of them harmless from each claim.

ELEVEN: The permittee shall exercise reasonable care to operate and maintain any work authorized herein to preclude injury to or damage to any works necessary to any plan of flood control adopted by the Board or the Legislature, or interfere with the successful execution, functioning or operation of any plan of flood control adopted by the Board or the Legislature.

TWELVE: Should any of the work not conform to the conditions of this permit, the permittee, upon order of The Central Valley Flood Protection Board, shall in the manner prescribed by the Board be responsible for the cost and expense to remove, alter, relocate, or reconstruct all or any part of the work herein approved.

SPECIAL CONDITIONS FOR PERMIT NO. 19431 BD

LIABILITY AND INDEMNIFICATION

THIRTEEN: The permittee shall defend, indemnify, and hold harmless the Central Valley Flood Protection Board (Board) and the State of California, including its agencies or departments thereof, including but not limited to, any and all boards, commissions, officers, agents, employees, and representatives (Indemnities), against any and all claims, liabilities, charges, losses, expenses, and costs including the State's attorneys' fees (Liabilities), that may arise from, or by reason of: (1) any action or inaction by the Indemnities in connection with the issuance or denial of any permit, lease, or other entitlement; (2) as a result of approvals or authorizations given by the Board to the permittee pursuant to, or as a result of, permittee's permit application; (3) provisions of the issued permit or lease, provisions of CEQA, an environmental document certified or adopted by the Board related to the permit application, or any other regulations, requirements, or programs by the State, except for any such Liabilities caused solely by the gross negligence or intentional acts or the State or its officers, agents, and employees.

FOURTEEN: Permittee shall reimburse the Board in full for all reasonable costs and attorneys' fees, including, but not limited to, those charged to it by the California Office of Attorney General, that the Board incurs in connection with the defense of any action brought against the Board challenging this permit or any other matter related to this permit or the work performed by the State in its issuance of this permit. In addition, the permittee shall reimburse the Board for any court costs and reasonable attorneys' fees that the Board/Indemnities may be required by a court to pay as a result of such action. The permittee may participate in the defense of the action, but its participation shall not relieve it of its obligations under the conditions of this permit.

FIFTEEN: The Board and Department of Water Resources shall not be held liable for any damages to the permitted encroachment(s) resulting from releases of water from reservoirs, flood fight, operation, maintenance, inspection, or emergency repair.

AGENCY CONDITIONS

SIXTEEN: All work approved by this permit shall be in accordance with the submitted drawings and specifications dated July 1, 2019 except as modified by special permit conditions herein. No further work, other than that approved by this permit, shall be done in the area without prior approval of the Board.

SEVENTEEN: Permittee shall pay to the Board, an inspection fee(s) to cover inspection cost(s), including staff and/or consultant time and expenses, for any inspections before, during, post-construction, and regularly thereafter as deemed necessary by the Board.

EIGHTEEN: In the event that bank erosion injurious to the adopted plan of flood control occurs at or adjacent to the permitted encroachment(s), the permittee shall repair the eroded area and propose measures, to be approved by the Board, to prevent further erosion.

NINETEEN: The permittee shall be responsible for the repair of any damages to the channel, banks, floodway, or other flood control facilities due to construction, operation, or maintenance of the proposed project.

TWENTY: Correspondence was received from the Department of the Army (U.S. Army Corps of Engineers, Sacramento District) dated July 24, 2019, signifying that the District Engineer has no comments or recommendations regarding flood control because the proposed project does not affect a federally constructed project.

TWENTY-ONE: The permittee agrees to notify any new property/encroachment owner(s) that they are required to submit a permit Name Change request form to the Board upon completion of the sale. The new owner(s) will be required to comply with all permit conditions. Name Change forms are available at http://cvfpb.ca.gov/

TWENTY-TWO: The Board reserves the right to add additional, or modify existing, conditions when there is a change in ownership and/or maintenance responsibility of the work authorized under this permit.

PRE-CONSTRUCTION

TWENTY-THREE: Upon receipt of a signed copy of the issued permit the permittee shall contact the Board by telephone at (916) 574-0609 to schedule a preconstruction conference with the inspector that is assigned to your project. Failure to do so at least 10 working days prior to start of work may result in a delay of the project.

CONSTRUCTION

TWENTY-FOUR: No construction work of any kind shall be done during the flood season from November 1 to April 15 without prior approval of the Board. Failure to submit a Time Variance Request to the Board at least 10 working days prior to November 1 may result in a delay of the project.

TWENTY-FIVE: No material stockpiles, temporary buildings (except the temporary bridges to accommodate traffic during construction), or equipment shall remain in the floodway during the flood season from November 1 to April 15.

TWENTY-SIX: The existing bridges shall be completely removed and disposed of outside the limits of the Cosumnes River Designated Floodway.

TWENTY-SEVEN: Piers, bents, and abutments being dismantled shall be removed to at least 1 foot below the natural ground line and at least 3 feet below the bottom of the low-water channel.

TWENTY-EIGHT: Excavations in the riverbanks, to facilitate removal of the existing bridges shall be backfilled in layers and compacted to a density equal to that of the adjacent undisturbed material.

TWENTY-NINE: The soffit of the bridge shall be a minimum of 3 feet above the flood plane elevation of 44.58 feet, NAVD88 Datum.

POST-CONSTRUCTION

THIRTY: All debris generated by this project shall be properly disposed of outside the Cosumnes River Designated Floodway and off all Project Works.

THIRTY-ONE: The Cosumnes River Designated Floodway shall be restored to at least the condition that existed prior to commencement of work.

THIRTY-TWO: Upon completion of the project, the permittee shall submit as-constructed drawings to the Board to: Central Valley Flood Protection Board, Inspection Section, 3310 El Camino Avenue, Suite 170, Sacramento, California 95821.

OPERATIONS AND MAINTENANCE

THIRTY-THREE: After each period of high water, debris that accumulates at the site shall be completely removed from the Cosumnes River Designated Floodway.

THIRTY-FOUR: The permittee shall maintain the permitted encroachment(s) and the Project Works within the utilized area in the manner required and as requested by the authorized representative of the Board, the Department of Water Resources, or any other agency responsible for maintenance and shall, at all times, allow officials from these agencies to access any adjacent areas as necessary for flood control.

THIRTY-FIVE: The permitted encroachment(s) shall not interfere with the operation and maintenance of the flood control project. If the permitted encroachment(s) are determined by any agency responsible for operation or maintenance of the flood control project to interfere, the permittee shall be required, at permittee's cost and expense, to modify or remove the permitted encroachment(s) within 30-days of being notified in writing by the Board. In the event of an emergency a shorter timeframe may be required. If the permittee does not comply, the Board, or a designated agency or company authorized by the Board, may modify or remove the encroachment(s) at the permittee's expense.


PROJECT ABANDONMENT / CHANGE IN PLAN OF FLOOD CONTROL


THIRTY-SIX: If the project, or any portion thereof, is to be abandoned in the future, the permittee or successor shall abandon the project under direction of the Board at the permittee's or successor's cost and expense.

THIRTY-SEVEN: The permittee may be required, at permittee's cost and expense, to remove, alter, relocate, or reconstruct all or any part of the permitted encroachment(s) if in the discretion of the Board the removal, alteration, relocation, or reconstruction is necessary as part of or in conjunction with any present or future flood control plan or project or if the project is not maintained or is damaged by any cause. The permittee shall remove the encroachment(s) within 30-days of being notified in writing by the Board. In the event of an emergency a shorter timeframe may be required. If the permittee does not comply the Board will remove the encroachment(s) at the permittee's expense.

END OF CONDITIONS



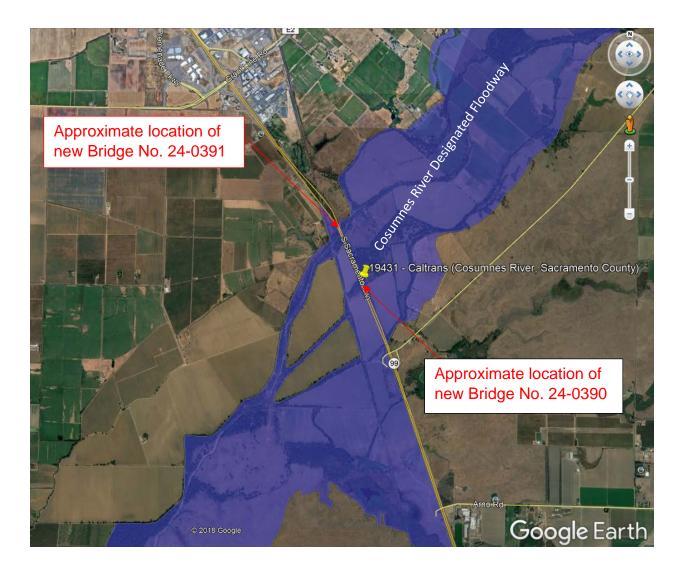

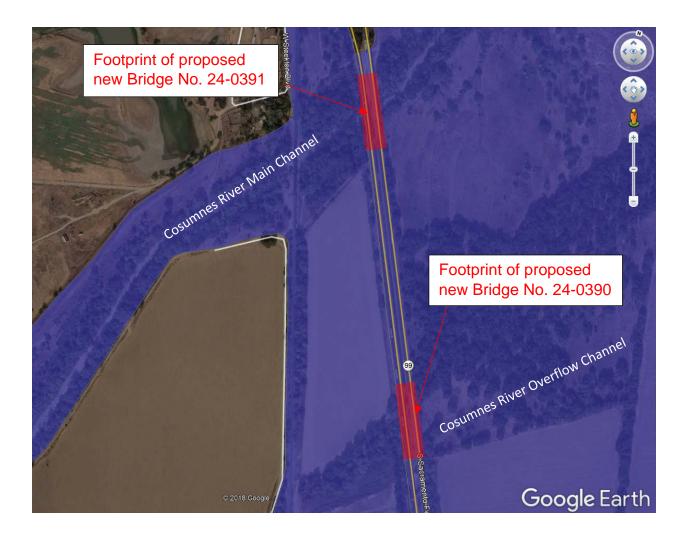





Cosumnes River Bridges spanning the main channel at Post Mile (PM) 8.4 (Bridge Nos. 24-0020R and 24-0020L)




Cosumnes River Bridges spanning the main channel at Post Mile (PM) 8.4 (Bridge Nos. 24-0020R and 24-0020L)

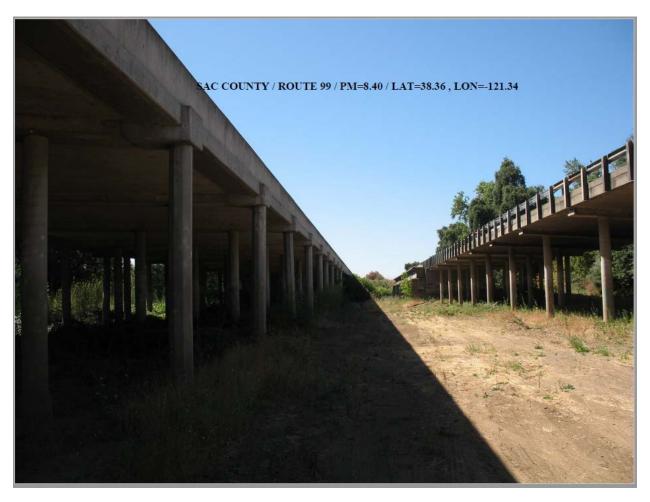

Cosumnes River Bridges spanning the main channel at Post Mile (PM) 8.4 (Bridge Nos. 24-0020R and 24-0020L)

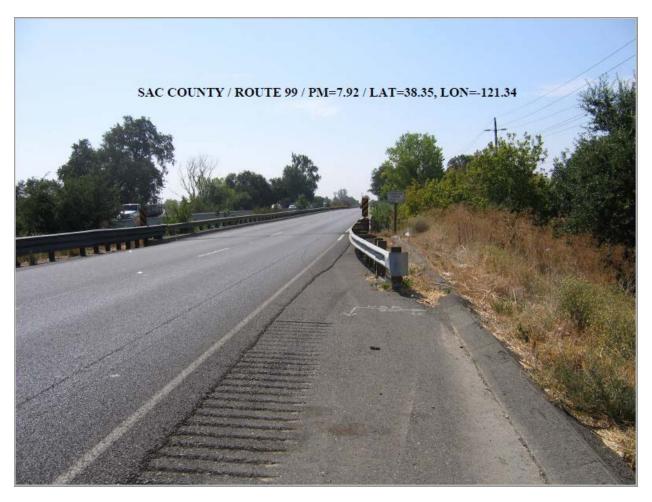

Cosumnes River Overflow Bridges spanning the overflow channel at PM 7.9. (Bridge Nos. 24-0021R and 24-0021L);

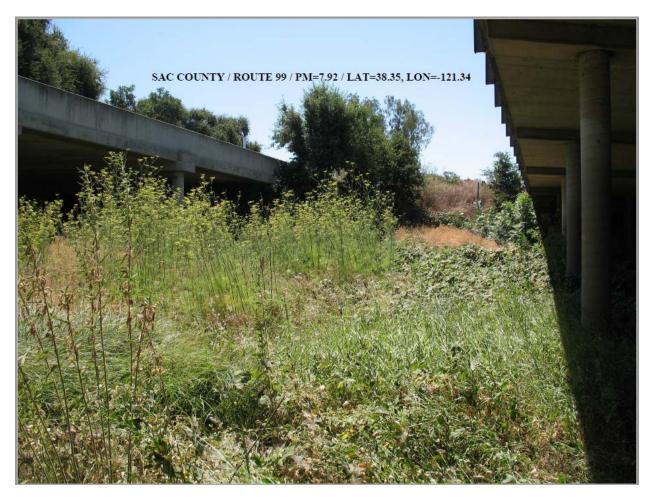

Cosumnes River Overflow Bridges spanning the overflow channel at PM 7.9. (Bridge Nos. 24-0021R and 24-0021L);



Cosumnes River Overflow Bridges spanning the overflow channel at PM 7.9. (Bridge Nos. 24-0021R and 24-0021L);


No. 19431 - Attachment C - Project Drawings


National Geodetic Vertical Datum: NAVD 88

65% UNCHECKED DETAILS


PROGRESS PRINT PRINTED DATE: 17-JUL-201 Office of Structure Design STATE OF CALIFORNIA

	Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
	03	Sac	99	PPPP	3333	####
9 n	PLA	MM. NS APPROV	IVIL ENGINE /DD/YYYY /AL DATE INIA OR ITS OFFICE ISLE FOR THE ACC	Mo.	ESS ION,	ENG INEER
			NED COPIES OF TH		CAL IFON	

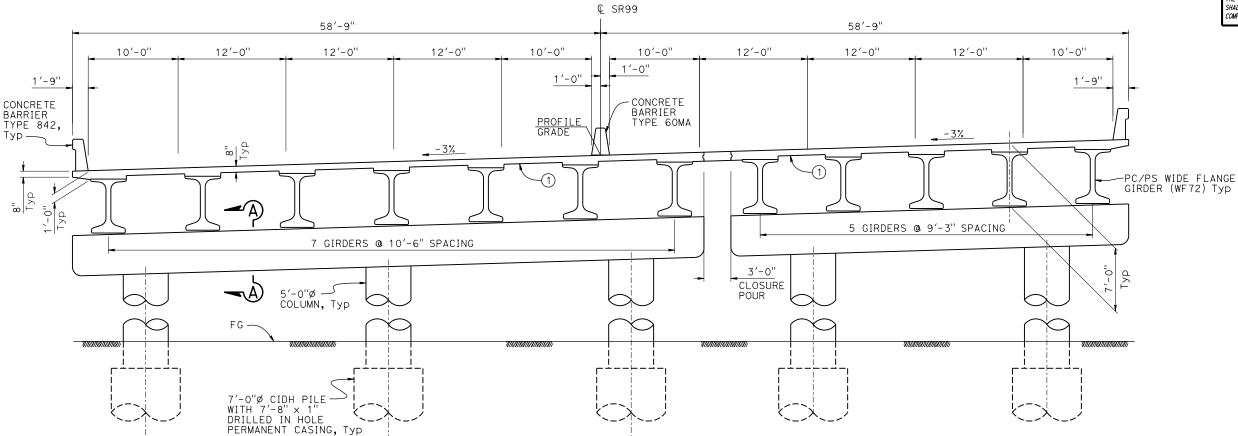



SECTION A-A

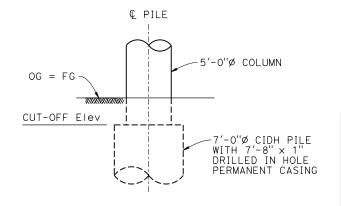

PIER PILE DETAIL

TYPICAL SECTION

HYDROLOGIC SUMMARY

Drainage Area: 725.8 mi²

100-Year (Caltrans) 91,300

Existing Proposed Br#24-20L/R) (Br#24-0391

Flood plain data are based upon information available when the plans were prepared and are shown to meet federal requirements. The accuracy of said information is not warranted

by the State and interested or affected parties should make

44.9

44.9

NOTES:

Overtopping Flood/ Flood of Record

117,000

n/a

n/a

n/a

- 1. LENGTH OF Col Avg = 35'-0"
- 2. LENGTH OF PERMANENT CASING = 50'-0"

(1) STAY IN PLACE METAL FORM (SIPMF), Typ

3. LENGTH OF PILE SHAFT = 125'-0"

PILE CUT-OF	F ELEVATION
SUPPORT	CUT-OFF Elev
Abut 1	40.0
Pier 2	36.0
Pier 3	36.0
Pier 4	36.0
Pier 5	36.0
Abut 6	40.0

12′-0"	7'-0"	
•		CUT-OFF Elev
		5'-0"Ø CIDH PILE W/ 5'-6"Ø PERMINEN' CASING, To† 8 PER ABUTMENT

NOTES:

- 1. LENGTH OF PILE = 100'-0"
- 2. LENGTH OF PERMANENT CASING = 50'-0"

ABUTMENT SECTION

NOTE: THE CONTRACTOR SHALL VERIFY ALL CONTROLLING FIELD DIMENSIONS BEFORE ORDERING OR FABRICATING ANY MATERIAL.

GARY BLAKESLEY

STRUCTURES DESIGN GENERAL PLAN SHEET ENGLISH) (REVISION 3/17/2017)

BRANCH CHIEF

	DESIGN	BY ALI YOUSIF	CHECKED X	LOAD & RESIS FACTOR DESIG		HL93 W/"LOW-BOY"; I	PERMIT DESIGN VEHICLE	
	DETAILS	BY X	CHECKED X	LAYOUT	BY ALI YO	DUSIF	X X	İ
_	QUANTITIES	BY X	CHECKED X	SPECIFICATIONS	BY X		PLANS AND SPECS COMPARED X	D
NERAL PLAN SHEET /17/2017)				DATE PLOTTED = FILE => 24-039			=> 16:23 ORIGINAL SCALE IN INCHES FOR eprixocsm% ଅପ୍ରସିଷ୍ଟେ REDUCED PLANS	0

Frequency

Discharge, cfs Channel

Condition

WSE at Bridge, ft (NAVD 88)

their own investigation.

STATE OF
CALIFORNIA
DEPARTMENT OF TRANSPORTATION

٦	DIVISION OF ENGINEERING SERVICES	В
	STRUCTURE DESIGN	2
	DESIGN BRANCH 6	L
u I	DEGIGIN DITARION O	

SERVICES	BRIDGE No.
I	24-0391
6	POST MILE
U	8 40

	1/4"	= 1'-0"
RIDGE No.		
4-0391	COSUMNES	RIVER

No.					/	
	COSUMNES	RIVER	BRID	ìE (REPL	ACE
ILE						
0	I GEN	NERAL	PLAN	No.	. 2	


UNIT: 3591 DISREGARD PRINTS BEARING EARLIER REVISION DATES -PROJECT NUMBER & PHASE: 03 1200 0069 1 CONTRACT No.: 03-0F2804

No. 19431 - Attachment C - Project Drawings National Geodetic PROGRESS PRINT 03 Sac |????| #### Vertical Datum: 66'-6" 70'-3" PRINTED DATE: 17-JUL-201 NAVD 88 REGISTERED CIVIL ENGINEER DATE/ STAGE 2 CONSTRUCTION STAGE 2 TRAFFIC Office of **TEMPORARY** 1'-9" MM/DD/YYYY Structure Design BARRIER (TYPE K) PLANS APPROVAL DATE STATE OF CALIFORNIA THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS CIVIL € SR99 SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR 24'-0" 30'-9" COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET. STAGE 2 TRAFFIC SB STAGE 2 TRAFFIC NB CONCRETE PROFILE GRADE -WIDENING STAGE 1 CONSTRUCTION, SEE BARRIER 2'-0" TYPE 842, n TEMPORARY BRIDGE PLAN SET PIER CAP 2'DEEP X 3'WIDE ij 65% UNCHECKED DETAILS ii ii NOTE: For details not shown see "TYPICAL SECTION" on "GENERAL PLAN No. 2" sheet STAGE 2 LEGEND: — New structure REMOVAL ---- Existing structure STAGE 2 Limits of Bridge removal Limits of Bridge removal, Stage 1 70'-3" 47'-3" STAGE 3 TRAFFIC STAGE 3 COSTRUCTION € SR99 TEMPORARY BARRIER 14'-6" 42'-6" (TYPE K) 11'-6" 24'-0" 4'-0" 1'-9" STAGE 3 TRAFFIC SB STAGE 3 TRAFFIC NB — CONCRETE **TEMPORARY** 4'-0" BARRIER 4'-0" TYPE 842, (TYPE K) 3'-0" CLOSURE! 6 1.1 STAGE 3 EXISTING BRIDGE For details not shown see REMOVAL "TYPICAL SECTION" on "GENERAL PLAN No. 2" sheet THE CONTRACTOR SHALL VERIFY ALL CONTROLLING FIELD DIMENSIONS BEFORE ORDERING OR FABRICATING STAGE 3 ANY MATERIAL. LOAD & RESISTANCE | LIVE LOADING | HL93 W/"LOW-BOY"; PERMIT DESIGN VEHICLE STATE OF DIVISION OF ENGINEERING SERVICES DESIGN ALI YOUSIF COSUMNES RIVER BRIDGE (REPLACE) 24-0391 CALIFORNIA DETAILS LAYOUT ALI YOUSIF POST MILE DESIGN BRANCH 6 GARY BLAKESLEY **GENERAL PLAN No. 3** CHECKED DEPARTMENT OF TRANSPORTATION QUANTITIES 8.40 SPECIFICATIONS BRANCH CHIEF DATE PLOTTED => 17-JUL-2019 TIME PLOTTED => 16:24 ORIGINAL SCALE IN INCHES FOR FILE => 24-0391-g-gill plans_cosumnesu6ERNAMEppixcemt89939gn REDUCED PLANS UNIT: 3591 STRUCTURES DESIGN GENERAL PLAN SHEET ENGLISH) (REVISION 3/17/2017) DISREGARD PRINTS BEARING EARLIER REVISION DATES -PROJECT NUMBER & PHASE: 03 1200 0069 1 CONTRACT No.: 03-0F2804

No. 19431 - Attachment C - Project Drawings National Geodetic Vertical Datum: INCOMPLETE PLAN 03 Sac ???? #### NAVD 88 FOR DESIGN STUDY 446+75.00 EVC 437+25.00 BVC PRINTED
DATE: 17-JUL-201 Elev 57.37 REGISTERED CIVIL ENGINEER Elev 55.83 DATE Office of Structure Design 950' VC -0.7650% 1.0889% MM/DD/YYYY R/C = -0.195%/StaPLANS APPROVAL DATE STATE OF CALIFORNIA THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS CIVIL SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR PROFILE GRADE COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET. 65% UNCHECKED DETAILS NO SCALE LEGEND: — Indicates new structure 665'-0" (MEASURED ALONG "SR99" LINE) ---- Indicates existing structure 93'-0" 111'-0" 111'-0" 93'-0" [////] Indicates Limits of Bridge removal 1 PAINT "COSUMNES RIVER OVERFLOW BRIDGE"
"BRIDGE No. 24-0390"
YEAR COMPLETED Abut Abut 7 2 APPROACH SLAB TYPE N(30) RSP PIER 2 PIER 3 PIER 4 PIER 5 PIER 6 -WSE Elev 44.9 FREEBOARD (3) CONCRETE BARRIER TYPE 60MA (4) CONCRETE BARRIER TYPE 842 DATUM Elev = -45.00437+00 439+00 440+00 441+00 443+00 444+00 445+00 438+00 442+00 ELEVATION 1" = 40' TOE OF SLOPE, TRAFFIC NOTES Тур TOP OF FILL. 28° 0′0" Тур -SKEW VEHICULAR TRAFFIC: BB S+a = 437+49.00TYP 1. - New alignment. No traffic at the site. Elev = 56.082. - Traffic will be detoured away from the site. (4) 3. X Traffic will be carried on the structure. Stage construction X will be required. 4. - Traffic will pass under the structure on TO LODI (Name of St or Hwy) EB Sta = 444+14.00A. - No falsework allowed over traffic. Elev = 58.70B. - Falsework opening(s) required: N24°20′01.40"W Temp Vertical Width of Traffic Opening 438+00 439+00 440+00 441+00 443+00 444+00 445+00 437+00 Clearance ___ Bound ____ Bound TO SACRAMENTO - Two-Way C. - Temporary traffic lane reduction needed for footing excavation. PEDESTRIAN TRAFFIC: TOP OF FILL, Falsework opening regired on: Тур © PIER 5 © PIER 2 © PIER 3 © PIER 4 (Name of St) Location Height Width PLAN TOE OF SLOPE, RAILROAD TRAFFIC: Typ Falsework opening regired over: (Name of RR) THE CONTRACTOR SHALL VERIFY ALL CONTROLLING FIELD DIMENSIONS Vertical Clearance Horiz Clear Width BEFORE ORDERING OR FABRICATING ANY MATERIAL. HL93 W/"LOW-BOY"; PERMIT DESIGN VEHICLE DIVISION OF ENGINEERING SERVICES STATE OF DESIGN Mufeed Khalaf COSUMNES RIVER OVERFLOW BRIDGE (REPLACE) 24-0390 CALIFORNIA DETAILS LAYOUT J. Reid / S. Shambra Mufeed Khalaf POST MILE DESIGN BRANCH 6 **GENERAL PLAN No. 1** CHECKED DEPARTMENT OF TRANSPORTATION QUANTITIES 7.92 SPECIFICATIONS BRANCH CHIEF UNIT: 3591 DATE PLOTTED => 17-JUL-2019 TIME PLOTTED => 16:14 STRUCTURES DESIGN GENERAL PLAN SHEET ENGLISH) (REVISION 3/17/2017) FILE => 24-0390-a-all plans_cosumnesUSEVAMEverYisW48395 PROJECT NUMBER & PHASE: 03 1200 0069 1 CONTRACT No.: 03-0F2804

65% UNCHECKED DETAILS

INCOMPLETE PLAN FOR DESIGN STUDY PRINTED
DATE: 17-JUL-201 Office of Structure Design STATE OF CALIFORNIA

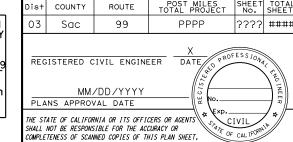

€ SR99 58'-9" 58'-9" 12'-0" 12'-0" 10'-0" 12'-0" 12'-0" 10'-0" 12'-0" 10'-0" 12'-0" 10'-0" 1'-0" 1'-0" 1'-9" 1'-9" CONCRETE BARRIER CONCRETE TYPE 60MA BARRIER TYPE 842, Тур -2% -WF60 WIDE FLANGE GIRDER, TYP 8 GIRDERS @ 9'-0" 6 GIRDERS @ 7'-6" 3'-0" CLOSURE POUR 5'-0"Ø — COLUMN, Тур

NOTE: Girders not shown

Тур

SECTION A-A $\frac{3}{6}$ " = 1'-0"

ℚ PILE 5'-0"Ø COLUMN CUT-OFF Elev 7'-0"Ø CIDH PILE WITH 7'-8" × 1" DRILLED IN HOLE PERMANENT CASING

7'-0"Ø CIDH PILE VITH 7'-8" x 1"
DRILLED IN HOLE
PERMANENT CASING, Typ

National Geodetic Vertical Datum:

PIER PILE DETAIL

THE CONTRACTOR SHALL VERIFY ALL CONTROLLING FIELD DIMENSIONS BEFORE ORDERING OR FABRICATING ANY MATERIAL.

TYPICAL SECTION

HYDROLOGIC SUMMARY Drainage Area: 725.8 mi² Overtopping Flood/ Flood of Record 100-Year (Caltrans) Frequency Discharge, cfs 91,300 117,000 Channel Overflow-1 n/a Existing Proposed (Br#24-21L/R) (Br#24-0390) Condition n/a WSE at Bridge, ft (NAVD 88) 44.9 44.9 n/a


Flood plain data are based upon information available when the plans were prepared and are shown to meet federal requirements. The accuracy of said information is not warranted by the State and interested or affected parties should make their own investigation.

STAY IN PLACE METAL FORM (SIPMF) BETWEEN GIRDERS, Typ

NOTES:

- 1. LENGTH OF Col Avg = 25'-0"
- 2. LENGTH OF PERMANET CASING = 50'-0"
- 3. LENGTH OF PILE SHAFT = 100'-0"

PILE CUT-OFF	F ELEVATION				
Support	Cut-off Elev				
Abut 1	35.0				
Pier 2	33.0				
Pier 3	33.0				
Pier 4	33.0				
Pier 5	33.0				
Pier 6	33.0				
Abut 7	35.0				

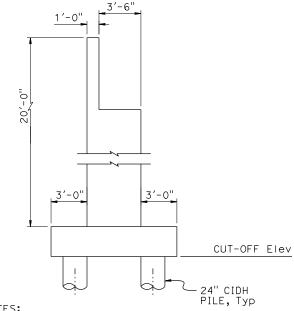

NOTES:

- 1. LENGTH OF PILE = 45'-0"
- 2. LENGTH OF PERMANENT CASING = 25'-0"

ABUTMENT SECTION


1/4" = 1'-0"

	DESIGN	BY Mufeed Khalaf	CHECKED	LOAD & RESIS	STANCE LIVE LOADING HL93 W/"LOW-BOY";	PERMIT DESIGN VEHICLE		DIVISION OF ENGINEERING SERVICES STRUCTURE DESIGN	BRIDGE No.	COSUMNE	S RIVER OVERFLOW	BRIDGE (I	REPLACE)
X BRANCH CHIEF	DETAILS QUANTITIES	J. Reid / S. Shambra	CHECKED X CHECKED	LAYOUT SPECIFICATIONS	Mufeed Khalaf	CHECKED X PLANS AND SPECS COMPARED	CALIFORNIA DEPARTMENT OF TRANSPORTATION	DESIGN BRANCH 6	POST MILE 7.92			No. 2	
STRUCTURES DESIGN GENERAL PLAN SHEET (ENGLISH) (REVISION 3/17/2017)	I		1 ^		A -> 17-JUL-2019 TIME PLOTTED 			JNIT: 3591 PROJECT NUMBER & PHASE: 03 1200 0069		No.: 03-0F2804	DISREGARD PRINTS BEARING EARLIER REVISION DATES	REVISION DATES 4-5-19 6-4-19	SHEET OF

UNIT: 3591

PROJECT NUMBER & PHASE: 03 1200 0069 1 CONTRACT No.: 03-0F2804

DISREGARD PRINTS BEARING EARLIER REVISION DATES -

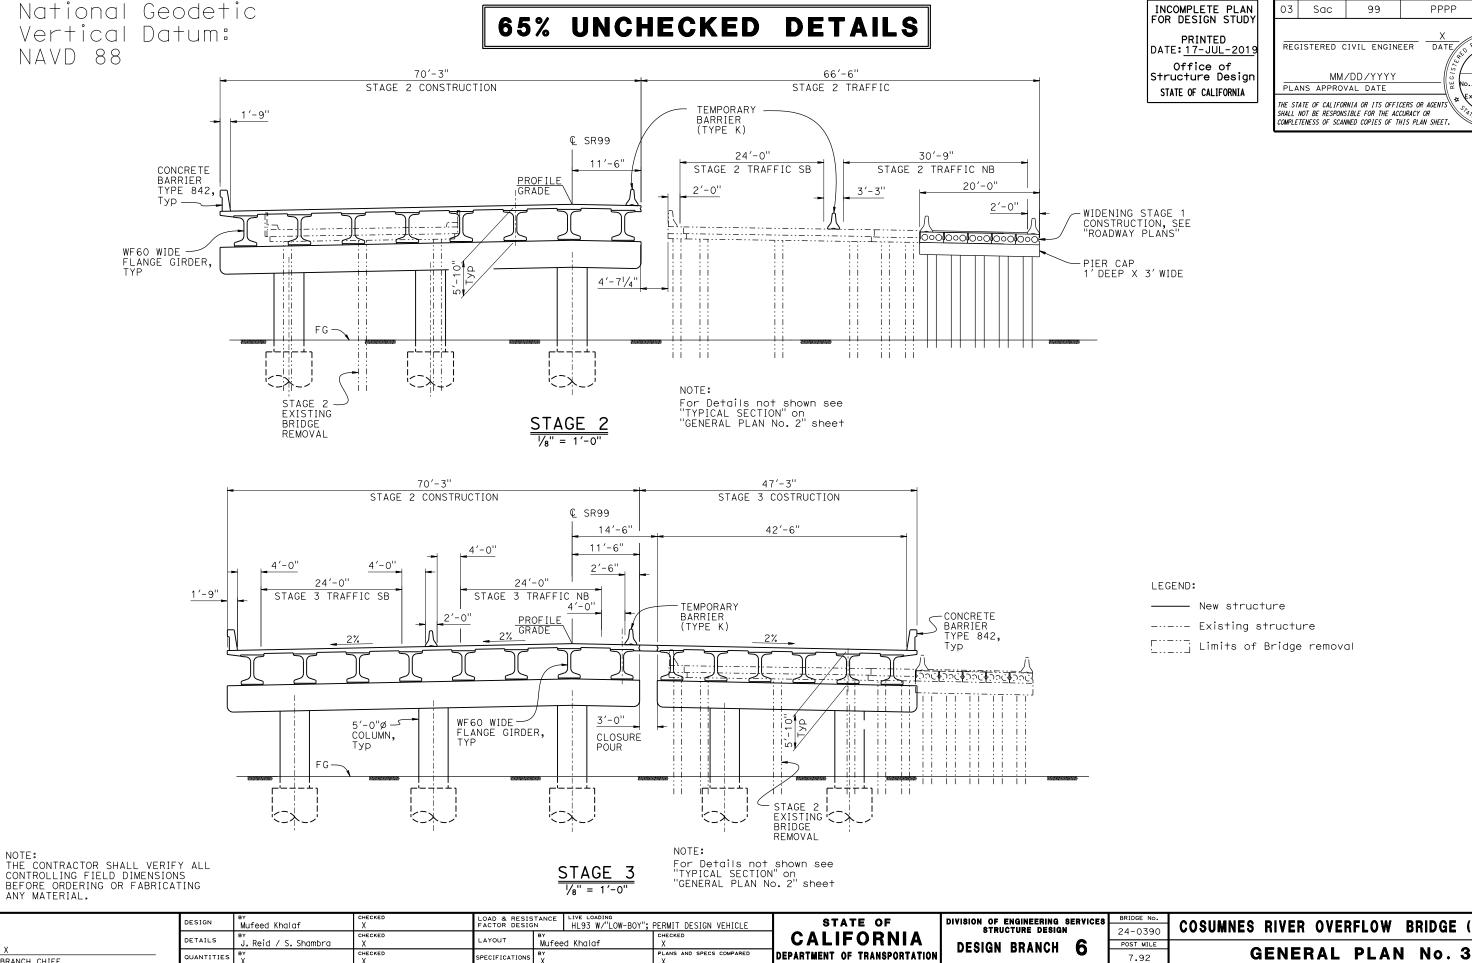

DATE PLOTTED => 17-JUL-2019 TIME PLOTTED => 16:25
FILE => 24-0390-a-aii pians_cosumnesU6EF84AM£ver7fis448@95

BRANCH CHIEF

STRUCTURES DESIGN GENERAL PLAN SHEET ENGLISH) (REVISION 3/17/2017)

No. 19431 - Attachment C - Project Drawings National Geodetic INDEX TO PLANS 03 Sac ???? #### 90% PLANS PROGRESS PRINT Vertical Datum: SHEET No. TITLE NAVD 88 PRINTED REGISTERED CIVIL ENGINEER DATE GENERAL PLAN GENERAL NOTES DATE: 17-JUL-2019 POT 469+86.00 POT 462+37.02 Office of FOUNDATION PLAN No. MM/DD/YYYY Elev 55.91 FOUNDATION PLAN No. Structure Design Elev 54.83 PLANS APPROVAL DATE ABUTMENT 1 LAYOUT
ABUTMENT 13 LAYOUT
ABUTMENT DETAILS No. 1
ABUTMENT DETAILS No. 2
PIER LAYOUT (TYPICAL) STATE OF CALIFORNIA LEGEND: THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS CIVIL SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR +0.145% ---- Existing Structure COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET. ➤ Indicates direction of Flow PIER DETAILS (TYPICAL)
PIER LAYOUT (PIER 3 AND 4) <"T1" LINE 100 year Storm Elevation = 44.90' PIER DETAILS (PIER 3 AND 4) 20'-0" Indicates future work TEMPORARY 2'-0" 16'-0" 2'-0" PROFILE GRADE RAILING (TYPE K), Typ -NO SCALE PC/PS CONCRETE BOX GIRDER — EXISTING BRIDGE c 2'-0 -11/2% 697'-0" MEASURED ALONG "T1" LINE 52'-0" 52'-0" 52'-0" 125'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" MAIN SPAN - ¥ TEMPORARY BRIDGE DECK ABUT 13 ELEVATION MATCHES ABUT 1 EXISTING BRIDGE PIER 2 PIER 3 PIER 4 PIER 5 PIER 6 PIER 7 PIER 8 PIER 9 PIER 10 PIER 11 PIER 12 DECK ELEVATION -18"Ø CISS PILES DATUM Elev = -40.00'MAIN SPAN SECTION 462+00 463+00 464+00 465÷00 466+00 467+00 468÷00 469÷00 470+00 S"T1" LINE ELEVATION 20'-0" EXISTING BRIDGE TEMPORARY 2'-0" 16'-0" 2'-0" No. 24-0020R RAILING (TYPE K), Typ PC/PS CONCRETE SLAB EXISTING TO LODI 470+00 BRIDGE (2'-0 469+00 -11/2% 468+00 467+00 466+00 465+00 464+00 463+00 462+00 BB Sta 462+88.28 EB Sta 469+85.23 Elev 54.90 Elev 55.91 "T1" LINE 462+00 N25°22′43"W 463+00 464+00 465+00 466+00 ¥467+00 ×468+00 `\469+00 470+00 TOP OF FILL TOP OF FILL 11/2: N24°20′39"W TO SACRAMENTO TEMPORARY BRIDGE PLAN 24-0020R T-Br -18"Ø CISS PILES TOE OF SLOPE -TOE OF SLOPE TEMPORARY BRIDGE DECK
ELEVATION MATCHES
EXISTING BRIDGE
DECK ELEVATION — THE CONTRACTOR SHALL VERIFY ALL CONTROLLING FIELD DIMENSIONS BEFORE ORDERING OR FABRICATING TYPICAL SECTION ANY MATERIAL. LOAD & RESISTANCE | LIVE LOADING | HL93 W/ "LOW-BOY"; PERMIT DESIGN VEHICLE BRIDGE No. STATE OF DIVISION OF ENGINEERING SERVICES DESIGN YOLANDA PULIDO-VILLEGAS COSUMNES RIVER TEMPORARY BRIDGE 24-20R T-Br CALIFORNIA DETAILS LAYOUT R. ENRIQUEZ / S. SHAMBRA . L. CHOLL POST MILE DESIGN BRANCH GARY BLAKESLEY **GENERAL PLAN** DEPARTMENT OF TRANSPORTATION QUANTITIES SPECIFICATIONS 8.40 BRANCH CHIEF DATE PLOTTED => 17-JUL-2019 UNIT: 3591 STRUCTURES DESIGN GENERAL PLAN SHEET ENGLISH) (REVISION 1/11/2019) TIME PLOTTED => 16:29 USERNAME => \$148295 DISREGARD PRINTS BEARING EARLIER REVISION DATES -05-03-19 06-04-19 6-26-19 FILE => 24-20r-tbr-a-gp01.dgn PROJECT NUMBER & PHASE: 03 1200 0069 1 CONTRACT No.: 03-0F2804

No. 19431 - Attachment C - Project Drawings Dist COUNTY National Geodetic 03 Sac ???? #### Vertical Datum: PROGRESS PRINT NAVD 88 BVC 437+62.14 EVC 442+62.14 REGISTERED CIVIL ENGINEER DATE PRINTED DATE: 17-JUL-2019 Elev 50.76 Elev 50.81 Office of MM/DD/YYYY Structure Design PLANS APPROVAL DATE 500' VC -0.378% STATE OF CALIFORNIA +0.395% LEGEND: THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS R/C = -0.1546% / STACIVIL SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET. ---- Existing Structure Indicates direction of Flow 90% PLANS PROFILE GRADE 100 year Storm Elevation = 44.90' NO SCALE Indicates direction of Flow 676'-0" MEASURED ALONG "T1" LINE BB ─"T1" LINE 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52'-0" 52′-0" 20'-0" 2'-0" 16'-0" 2'-0" TEMPORARY <u></u>* ■ RAILING (TYPE K), Typ PC/PS CONCRETE SLAB ABUT 1 ABUT 14 EXISTING BRIDGE 24-0021R PIER 3 PIER 4 PIER 5 PIER 6 PIER 7 PIER 8 PIER 9 PIER 10 PIER 11 PIER 12 2'-0' -11/2% DATUM Elev = -40.00'437+00 438+00 439+00 443+00 444+00 445+00 440+00 441+00 442+00 1'-11" **ELEVATION** 1" = 40' بح EXISTING BRIDGE SOFFIT EXISTING BRIDGE No. 24-0021R TEMPORARY -18"Ø CISS PILES BRIDGE SOFFIT MATCHES EXISTING BRIDGE SOFFIT -TYPICAL SECTION TO LODI "SR99" LINE 438+00 439+00 440+00 441+00 442+00 443+00 444+00 BB Sta 437+63.02 EB Sta 444+39.07 Elev 50.76 Elev 50.14 INDEX TO PLANS "T1" LINE TO SACRAMENTO N24°20′39"W 437+00 438+005 439+00 440+00 * 441+00 ×442+00 ×443+00 **`** 444+00 SHEET No. TITLE GENERAL PLAN
GENERAL NOTES
FOUNDATION PLAN No. 1
FOUNDATION PLAN No. 2
ABUTMENT 1 LAYOUT
ABUTMENT 14 LAYOUT TOP OF FILL --1½: 1 11/2: 1 TOP OF FILL TEMPORARY BRIDGE TOE OF SLOPE 24-0021R T-Br TOE OF SLOPE ABUTMENT DETAILS No. 1 ABUTMENT DETAILS No. 2 PIER LAYOUT PIER DETAILS PLAN 10 THE CONTRACTOR SHALL VERIFY ALL CONTROLLING FIELD DIMENSIONS BEFORE ORDERING OR FABRICATING ANY MATERIAL. LOAD & RESISTANCE | LIVE LOADING | FACTOR DESIGN | HL93 W/ "LOW-BOY"; PERMIT DESIGN VEHICLE BRIDGE No. A. YOUSIF
Y. PULIDO-VILLEGAS DIVISION OF ENGINEERING SERVICES STATE OF DESIGN COSUMNES RIVER OVERFLOW TEMPORARY BRIDGE 24-21R T-Br CALIFORNIA DETAILS LAYOUT R. ENRIQUEZ / S. SHAMBRA . L. CHOLL POST MILE DESIGN BRANCH GARY BLAKESLEY **GENERAL PLAN** PLANS AND SPECS COMPARED DEPARTMENT OF TRANSPORTATION A. YOUSIF QUANTITIES Y. PULIDO-VILLEGAS SPECIFICATIONS 7.92 M. OUEST BRANCH CHIEF UNIT: 3591 DATE PLOTTED => 17-JUL-2019 FILE => 24-21r-t-br-a-gp01.dgn STRUCTURES DESIGN GENERAL PLAN SHEET ENGLISH) (REVISION 1/11/2019) TIME PLOTTED => 16:32 DISREGARD PRINTS BEARING EARLIER REVISION DATES -05-03-19 06-04-19 06-26-19 USERNAME => s148295 PROJECT NUMBER & PHASE: 03 1200 0069 1 CONTRACT No.: 03-0F2804

No. 19431 - Attachment D - Hydraulic Profile Information

HEC-RAS River: main Reach: reach_5 Profile: FEMA

HEC-RAS F		each: reach_5											
Reach	River Sta	Profile	Plan	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
				(cfs)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft/s)	(sq ft)	(ft)	
reach_5	3377.951	FEMA	01	81000.00	22.64	36.60	33.33	36.66	0.000711	2.02	40475.57	10169.71	0.18
reach_5	3377.951	FEMA	02	81000.00	22.64	36.60	33.33	36.66	0.000711	2.02	40475.57	10169.71	
reach_5	3377.951	FEMA	01+temp	81000.00	22.64	36.60	33.33	36.66	0.000711	2.02	40475.57	10169.71	0.18
													
reach_5	4028.674	FEMA	01	81000.00	22.85	37.02	33.54	37.08	0.000589	1.92	42799.11	10355.82	
reach_5	4028.674	FEMA	02	81000.00	22.85	37.02	33.54	37.08	0.000589	1.92	42799.11	10355.82	
reach_5	4028.674	FEMA	01+temp	81000.00	22.85	37.02	33.54	37.08	0.000589	1.92	42799.11	10355.82	0.16
													
reach_5	4549.764	FEMA	01	81000.00	22.52	37.29	33.12	37.34	0.000427	1.67	49289.51	11365.25	
reach_5	4549.764	FEMA	02	81000.00	22.52	37.29	33.12	37.34	0.000427	1.67	49289.51	11365.25	
reach_5	4549.764	FEMA	01+temp	81000.00	22.52	37.29	33.12	37.34	0.000427	1.67	49289.51	11365.25	0.14
	4055 474	FENAN	04	04000.00	04.00	07.47	00.40	07.50	0.000470	4 70	40000.04	44000 40	0.44
reach_5	4955.474	FEMA	01	81000.00	24.38	37.47	33.18	37.52	0.000470	1.73	48232.21	11332.43	
reach_5	4955.474	FEMA	02	81000.00	24.38	37.47	33.18	37.52	0.000470	1.73	48232.21	11332.43	
reach_5	4955.474	FEMA	01+temp	81000.00	24.38	37.47	33.18	37.52	0.000470	1.73	48232.21	11332.43	0.14
reach 5	5383.082	FEMA	01	81000.00	24.37	37.69	33.50	37.74	0.000562	1.84	44716.45	11240.74	0.16
reach 5	5383.082	FEMA	02	81000.00	24.37	37.69	33.50	37.74	0.000562	1.84	44716.45	11240.74	
reach 5	5383.082	FEMA	01+temp	81000.00	24.37	37.69	33.50	37.74	0.000562	1.84	44716.45	11240.74	
reacri_5	3363.062	FEIVIA	01+temp	81000.00	24.31	37.09	33.30	31.14	0.000302	1.04	447 10.45	11240.74	0.10
reach 5	5903.590	FEMA	01	81000.00	24.39	37.95	33.19	38.00	0.000428	1.67	48380.09	10410.99	0.14
reach 5	5903.590	FEMA	02	81000.00	24.39	37.95	33.19	38.00	0.000428	1.67	48380.09	10410.99	
reach_5	5903.590	FEMA	01+temp	81000.00	24.39	37.95	33.19	38.00	0.000428	1.67	48380.09	10410.99	
.5461_5	3300.330	LIVIA	o i · tomp	0.000.00	24.38	31.33	33.19	30.00	0.000420	1.07	40000.08	10410.88	0.14
reach 5	6452.022	FEMA	01	81000.00	24.24	38.18	33.04	38.21	0.000375	1.60	51143.69	10819.80	0.13
reach 5	6452.022	FEMA	02	81000.00	24.24	38.18	33.04	38.21	0.000375	1.60	51143.69	10819.80	
reach_5	6452.022	FEMA	01+temp	81000.00	24.24	38.18	33.04	38.21	0.000375	1.60	51143.69	10819.80	
			P			50.10	20.01	20.21	2.2200.0		,		5.10
reach 5	6987.560	FEMA	01	81000.00	25.80	38.37	32.82	38.41	0.000346	1.55	52825.13	11126.93	0.12
reach 5	6987.560	FEMA	02	81000.00	25.80	38.37	32.82	38.41	0.000346	1.55	52825.13	11126.93	
reach_5	6987.560	FEMA	01+temp	81000.00	25.80	38.37	32.82	38.41	0.000346	1.55	52825.13	11126.93	
reach_5	7493.587	FEMA	01	81000.00	22.47	38.53	32.40	38.57	0.000283	1.45	56083.18	11081.52	0.11
reach_5	7493.587	FEMA	02	81000.00	22.47	38.53	32.40	38.57	0.000283	1.45	56083.18	11081.52	0.11
reach_5	7493.587	FEMA	01+temp	81000.00	22.47	38.53	32.40	38.57	0.000283	1.45	56083.18	11081.52	0.11
reach_5	7989.603	FEMA	01	81000.00	25.50	38.67	32.45	38.70	0.000253	1.41	58307.05	11251.41	0.11
reach_5	7989.603	FEMA	02	81000.00	25.50	38.67	32.45	38.70	0.000253	1.41	58307.05	11251.41	0.11
reach_5	7989.603	FEMA	01+temp	81000.00	25.50	38.67	32.45	38.70	0.000253	1.41	58307.05	11251.41	0.11
reach_5	8425.031	FEMA	01	81000.00	24.85	38.79	33.21	38.82	0.000296	1.38	59354.11	12672.67	0.11
reach_5	8425.031	FEMA	02	81000.00	24.85	38.79	33.21	38.82	0.000296	1.38	59354.11	12672.67	0.11
reach_5	8425.031	FEMA	01+temp	81000.00	24.85	38.79	33.21	38.82	0.000296	1.38	59354.11	12672.67	0.11
reach_5	8946.558	FEMA	01	81000.00	21.13	38.93	32.42	38.96	0.000253	1.32	61782.37	11911.81	0.10
reach_5	8946.558	FEMA	02	81000.00	21.13	38.93	32.42	38.96	0.000253	1.32	61782.37	11911.81	0.10
reach_5	8946.558	FEMA	01+temp	81000.00	21.13	38.93	32.42	38.96	0.000253	1.32	61782.37	11911.81	0.10
reach_5	9352.672	FEMA	01	81000.00	28.05	39.06	34.49	39.10	0.000450	1.53	53114.64	12834.24	
reach_5	9352.672	FEMA	02	81000.00	28.05	39.06	34.49	39.10	0.000450	1.53	53114.64	12834.24	
reach_5	9352.672	FEMA	01+temp	81000.00	28.05	39.06	34.49	39.10	0.000450	1.53	53114.64	12834.24	0.13
	0047.000			04000 00	07.04	20.04		20.05		4.00	50404.50		
reach_5	9647.686	FEMA	01	81000.00	27.61	39.21	34.84	39.25	0.000622	1.60	50481.56	14256.47	0.15
reach_5	9647.686	FEMA	02	81000.00	27.61	39.21	34.84	39.25	0.000622	1.60	50481.56	14256.47	
reach_5	9647.686	FEMA	01+temp	81000.00	27.61	39.21	34.84	39.25	0.000622	1.60	50481.56	14256.47	0.15
reach 5	9922.801	FEMA	01	81000.00	28.83	39.39	35.51	39.44	0.000726	1.58	45787.42	13193.77	0.16
reach 5	9922.801	FEMA	02	81000.00	28.83	39.39	35.51	39.44	0.000726	1.58	45787.42	13193.77	
reach 5	9922.801	FEMA	01+temp	81000.00	28.83	39.39	35.51	39.44	0.000726	1.58	45787.42	13193.77	
.5461_5	3022.001	LIVIA	o i · tonip	01000.00	20.00	33.38	33.31	33.44	0.000720	1.50	70101.42	10100.11	0.10
reach_5	10090.27	FEMA	01	81000.00	28.07	39.50	38.38	39.79	0.006524	4.33	18743.10	9166.88	0.49
reach 5	10090.27	FEMA	02	81000.00	28.07	39.50	38.38	39.79	0.006524	4.33	18743.10	9166.88	
reach 5	10090.27	FEMA	01+temp	81000.00	28.07	39.50	38.38	39.79	0.006524	4.33	18743.10	9166.88	
				2.300.00	20.07	55.50	55.50	55.75	2.300024	50		2.00.00	5.40
reach 5	10159.54	FEMA	01	81000.00	28.30	39.76	39.76	41.00	0.025089	9.22	9063.08	4822.81	0.98
reach 5	10159.54	FEMA	02	81000.00	28.30	39.76	39.76	41.00	0.025089	9.22	9063.08	4822.81	0.98
reach_5	10159.54	FEMA	01+temp	81000.00	28.30	39.76	39.76	41.00	0.025089	9.22	9063.08	4822.81	
				1									
reach_5	10279			Bridge									
reach_5	10399.81	FEMA	01	81000.00	29.81	44.58	38.47	44.61	0.000162	1.12	63459.78	13267.37	0.09
reach_5	10399.81	FEMA	02	81000.00	29.81	44.58	38.47	44.61	0.000161	1.12	63510.60	13268.13	0.09
reach_5	10399.81	FEMA	01+temp	81000.00	29.81	44.61	38.47	44.63	0.000160	1.12	63736.74	13271.48	0.09
reach_5	10484.85	FEMA	01	81000.00	29.28	44.60	38.18	44.62	0.000122	1.00	70699.51	13807.71	
reach_5	10484.85	FEMA	02	81000.00	29.28	44.61	38.18	44.63	0.000122	1.00	70752.34	13808.12	0.08
reach_5	10484.85	FEMA	01+temp	81000.00	29.28	44.63	38.18	44.65	0.000121	1.00	70987.30	13809.97	0.08
	1												
reach_5	10582.74 10582.74	FEMA FEMA	01	81000.00 81000.00	28.03	44.62 44.62	37.18 37.18	44.64 44.64	0.000111 0.000111	1.07 1.07	76715.01 76771.51	14114.64 14114.68	

HEC-RAS River: main Reach: reach_5 Profile: FEMA (Continued) No. 19431 - Attachment D - Hydraulic Profile Information

				MA (Continued)	,								IIIIalion
Reach	River Sta	Profile	Plan	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
				(cfs)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft/s)	(sq ft)	(ft)	
reach_5	10582.74	FEMA	01+temp	81000.00	28.03	44.64	37.18	44.66	0.000110	1.07	77022.42	14114.83	0.07
reach_5	10697.89	FEMA	01	81000.00	28.75	44.63	36.52	44.65	0.000098	1.03	79978.63	14189.54	0.07
reach_5	10697.89	FEMA	02	81000.00	28.75	44.64	36.52	44.65	0.000098	1.02	80035.24	14190.00	0.07
reach_5	10697.89	FEMA	01+temp	81000.00	28.75	44.66	36.52	44.67	0.000097	1.02	80286.84	14192.07	0.07
reach_5	10819.66	FEMA	01	81000.00	27.90	44.65	35.87	44.66	0.000088	0.98	84607.98	14268.84	0.07
reach_5	10819.66	FEMA	02	81000.00	27.90	44.65	35.87	44.67	0.000088	0.97	84668.39	14268.92	0.07
reach_5	10819.66	FEMA	01+temp	81000.00	27.90	44.67	35.87	44.69	0.000087	0.97	84936.70	14269.26	0.07
reach_5	10976.11	FEMA	01	81000.00	28.06	44.66	35.05	44.67	0.000077	0.93	88347.02	14490.56	0.06
reach_5	10976.11	FEMA	02	81000.00	28.06	44.67	35.05	44.68	0.000077	0.93	88409.87	14490.61	0.06
reach_5	10976.11	FEMA	01+temp	81000.00	28.06	44.69	35.05	44.70	0.000076	0.93	88688.98	14490.81	0.06
reach_5	11241.99	FEMA	01	81000.00	28.27	44.68	36.09	44.69	0.000075	0.89	91031.95	14624.57	0.06
reach_5	11241.99	FEMA	02	81000.00	28.27	44.69	36.09	44.70	0.000075	0.89	91094.75	14624.61	0.06
reach_5	11241.99	FEMA	01+temp	81000.00	28.27	44.71	36.09	44.72	0.000074	0.89	91374.00	14624.75	0.06
reach_5	11624.10	FEMA	01	81000.00	23.59	44.71	34.98	44.72	0.000072	0.88	93115.94	14962.07	0.06
reach_5	11624.10	FEMA	02	81000.00	23.59	44.71	34.98	44.73	0.000072	0.88	93179.89	14962.11	0.06
reach_5	11624.10	FEMA	01+temp	81000.00	23.59	44.73	34.98	44.75	0.000071	0.88	93464.16	14962.30	0.06
reach_5	11958.70	FEMA	01	81000.00	28.91	44.74	35.90	44.75	0.000119	1.06	76548.16	13759.36	0.08
reach_5	11958.70	FEMA	02	81000.00	28.91	44.74	35.90	44.76	0.000119	1.06	76603.82	13760.85	0.08
reach_5	11958.70	FEMA	01+temp	81000.00	28.91	44.76	35.90	44.78	0.000118	1.05	76851.09	13767.38	0.08
reach_5	12317.60	FEMA	01	81000.00	28.52	44.79	38.25	44.83	0.000316	1.52	53349.71	13240.82	0.12
reach_5	12317.60	FEMA	02	81000.00	28.52	44.79	38.25	44.83	0.000316	1.52	53395.84	13243.33	0.12
reach_5	12317.60	FEMA	01+temp	81000.00	28.52	44.81	38.25	44.85	0.000312	1.51	53601.02	13254.50	0.12
reach_5	12674.99	FEMA	01	81000.00	31.28	44.91	38.71	44.96	0.000394	1.63	49665.54	12938.00	0.13
reach_5	12674.99	FEMA	02	81000.00	31.28	44.92	38.71	44.96	0.000393	1.63	49706.91	12939.88	0.13
reach_5	12674.99	FEMA	01+temp	81000.00	31.28	44.93	38.71	44.98	0.000388	1.62	49890.97	12948.25	0.13
reach_5	13129.82	FEMA	01	81000.00	22.88	45.05	35.56	45.08	0.000182	1.29	62826.98	13219.77	0.09
reach_5	13129.82	FEMA	02	81000.00	22.88	45.05	35.56	45.08	0.000181	1.29	62865.93	13220.84	0.09
reach_5	13129.82	FEMA	01+temp	81000.00	22.88	45.07	35.56	45.09	0.000180	1.29	63039.28	13225.61	0.09
reach_5	13502.94	FEMA	01	81000.00	24.94	45.16	38.60	45.20	0.000407	1.41	51839.90	12035.64	0.13
reach_5	13502.94	FEMA	02	81000.00	24.94	45.16	38.60	45.20	0.000406	1.41	51880.36	12041.05	0.13
reach_5	13502.94	FEMA	01+temp	81000.00	24.94	45.18	38.72	45.22	0.000403	1.41	52059.50	12058.82	0.13
reach_5	13887.86	FEMA	01	81000.00	31.36	45.51	41.01	45.58	0.001013	1.64	39034.15	11393.16	0.19
reach_5	13887.86	FEMA	02	81000.00	31.36	45.51	41.01	45.59	0.001011	1.64	39063.75	11395.62	0.19
reach_5	13887.86	FEMA	01+temp	81000.00	31.36	45.52	41.01	45.60	0.001002	1.64	39193.68	11409.78	0.18
reach_5	14326.09	FEMA	01	81000.00	35.65	46.57	45.35	46.94	0.009315	4.89	16580.69	5671.06	0.50
reach_5	14326.09	FEMA	02	81000.00	35.65	46.57	45.35	46.94	0.009312	4.88	16582.61	5671.27	0.50
reach_5	14326.09	FEMA	01+temp	81000.00	35.65	46.58	45.35	46.95	0.009296	4.88	16592.56	5672.35	0.50
_													
reach_5	14758.10	FEMA	01	81000.00	30.22	48.24	45.61	48.40	0.001693	3.21	25209.25	6087.63	0.28
reach_5	14758.10	FEMA	02	81000.00	30.22	48.24	45.61	48.40	0.001693	3.21	25209.62	6087.64	0.28
reach_5	14758.10	FEMA	01+temp	81000.00	30.22	48.24	45.61	48.40	0.001693	3.21	25211.50	6087.74	0.28
													. = -
reach_5	15199.55	FEMA	01	81000.00	30.33	48.91	45.93	49.01	0.001130	2.62	30948.49	7292.53	0.22
reach_5	15199.55	FEMA	02	81000.00	30.33	48.91	45.93	49.01	0.001130	2.62	30948.73	7292.54	0.22
reach_5	15199.55	FEMA	01+temp	81000.00	30.33	48.91	45.93	49.01	0.001130	2.62	30950.04	7292.58	0.22
reach 5	15689.11	FEMA	01	81000.00	29.31	49.45	46.28	49.55	0.001072	2.58	31403.09	7268.61	0.22
reach 5	15689.11	FEMA	02	81000.00	29.31	49.45	46.28	49.55	0.001072	2.58	31403.26	7268.62	0.22
reach_5	15689.11	FEMA	01+temp	81000.00	29.31	49.45	46.28	49.55	0.001072	2.58	31404.12	7268.67	0.22
_													
reach_5	16161.12	FEMA	01	81000.00	30.13	49.93	46.54	50.02	0.000893	2.31	35005.00	8316.29	0.20
reach_5	16161.12	FEMA	02	81000.00	30.13	49.93	46.54	50.02	0.000893	2.31	35005.15		0.20
reach_5	16161.12	FEMA	01+temp	81000.00	30.13	49.93	46.54	50.02	0.000893	2.31	35005.86	8316.38	0.20
reach_5	16691.64	FEMA	01	81000.00	31.95	50.39	46.36	50.46	0.000775	2.17	37384.26	8809.50	0.19
reach_5	16691.64	FEMA	02	81000.00	31.95	50.39	46.36	50.46	0.000775	2.17	37384.37	8809.51	0.19
reach 5	16691.64	FEMA	01+temp	81000.00	31.95	50.39	46.36	50.46	0.000775	2.17	37384.94	8809.54	0.19
					230	22.50				=		, , , , , , ,	2.10
reach_5	17107.32	FEMA	01	81000.00	30.50	50.68	46.29	50.75	0.000633	2.05	39436.23	8649.85	0.17
reach_5	17107.32	FEMA	02	81000.00	30.50	50.68	46.29	50.75	0.000633	2.05	39436.30	8649.86	0.17
reach_5	17107.32	FEMA	01+temp	81000.00	30.50	50.68	46.29	50.75	0.000633	2.05	39436.73	8649.87	0.17
0			J	2.000.00	55.50	33.30	.0.20	556	2.300000	2.00	100.70	20.0.07	5.17
	17499.39	FEMA	01	81000.00	30.28	51.00	47.25	51.13	0.001447	2.83	28618.09	7215.38	0.25
reach 5					30.28	51.00	47.25	51.13	0.001447	2.83	28618.12	7215.38	0.25
reach_5		IEEMA						01.101	0.001447	2.03	20010.12		0.25
reach_5	17499.39	FEMA	02 01+temp	81000.00						2 02			0.05
		FEMA FEMA	01+temp	81000.00	30.28	51.00	47.25	51.13	0.001447	2.83	28618.42		0.25
reach_5 reach_5	17499.39 17499.39	FEMA	01+temp	81000.00	30.28	51.00	47.25	51.13	0.001447		28618.42	7215.39	
reach_5	17499.39						47.25 47.72			2.83 2.66 2.66			0.25 0.23 0.23

HEC-RAS River: main Reach: reach_5 Profile: FEMA (Continued) No. 19431 - Attachment D - Hydraulic Profile Information

No.														Шапоп
March 5 1986 30 1986 30 1986 30 30 30 30 30 30 30 3	Reach	River Sta	Profile	Plan	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
Person 1,000 1,0		17050.00		04.4										
Minor Mino	reach_5	17958.32	FEMA	01+temp	81000.00	30.90	51.63	47.72	51.74	0.001245	2.66	30467.57	7539.39	0.23
Minor Mino														
Many St. March														0.24
March 5 18783.50 FEMA 01 01000.00 36.44 02.57 48.04 52.66 0.000724 2.31 30027.60 7114.47				1										0.24
meth 5 1975 50 FEMA 22 mg 1900 30 3.44 32.27 48.04 52.66 0.090724 2.31 38077.65 7714.47	reacn_5	18380.62	FEMA	U1+temp	81000.00	31.84	52.17	47.92	52.29	0.001326	2.81	28861.54	6900.98	0.24
meth 5 1975 50 FEMA 22 mg 1900 30 3.44 32.27 48.04 52.66 0.090724 2.31 38077.65 7714.47	reach F	10752 50	FEMA	04	84000.00	25.44	F2 F7	40.04	E2 65	0.000724	2.24	25027.65	7111 17	0.18
MERCS 1974-002 PENAL 01-seeps 1970-000 35-46 50-67 40-90 50-90 50-9077 77-14-47 1970-000 1970-000 35-36 50-30 40-90 50-90														0.18
mach_5 1914622 FPMA 02 8100.00 35.00 62.01 48.10 52.87 0.000427 150 4.000413 774122 mach_5 3 1914622 FPMA 02 8100.00 53.50 62.01 48.10 52.87 0.000427 150 4.000413 774122 mach_5 3 1914622 FPMA 02 8100.00 53.00 62.01 48.10 52.87 0.000427 150 4.000413 774122 mach_5 3 1914622 FPMA 02 8100.00 53.00 62.01 48.10 52.02 7 0.000427 150 4.000413 774124 mach_5 3 1914627 FPMA 01 8100.00 53.00 62.01 48.10 52.00 0.00041 150 4.000413 180.000413 180.000413 180.000413 180.000413 180.000413 180.000413 180.000413 180.000					_									0.18
March B 1948 22 FEMA 101-learny 101000 00 35.08 02.01 48.10 55.87 0.000022 1.00 42928.10 7741.22	Teach_5	10733.30	I LIVIA	OTTEMP	01000.00	33.44	32.31	40.04	32.03	0.000724	2.01	33021.11	7114.47	0.10
March B 1948 22 FEMA 101-learny 101000 00 35.08 02.01 48.10 55.87 0.000022 1.00 42928.10 7741.22	reach 5	19146.22	FEMA	01	81000.00	35.36	52.81	48.10	52.87	0.000422	1.90	42628.13	7841.23	0.14
March 5 1949 22 FEMA Distingue 1900 100 25.00 52.01 49.10 52.87 0.000022 1.90 42802.21 7941.24 1.0000.05 1.000 4.0000.05 1.0000.05 1.000 4.0000.05 1.000 4.0000.05 1.000 4.0000.05 1.000 4.0000.05 1.000 4.0000.05 1.000 4.0000.05 1.000 4.0000.05 1.000 4.0000.05 1.000 4.0000.05 1.00000.05 1.0000.05 1.0000.05 1.0000.05 1.0000.05 1.0000.05 1.0000.05 1.0000.05 1.0000.05 1.0000.05 1.0000.05														0.14
mech_5 19013 67 FEMA 01														0.14
mach_5. 1991367 PEMA 02 81000.00 35.02 63.00 48.19 53.04 0.000316 1.60 48904.27 8882.12 mach_5. 20046.06 FEMA 01 81000.00 35.02 63.15 48.68 53.00 0.000419 1.82 44400.96 8646.50 mach_5. 20046.06 FEMA 01 81000.00 35.02 63.15 48.68 53.00 0.000419 1.82 44400.96 8646.50 mach_5. 20046.07 FEMA 02 81000.00 35.02 63.15 48.08 53.00 0.000419 1.82 44400.96 8646.50 mach_5. 20046.07 FEMA 02 81000.00 35.02 63.15 48.08 53.00 0.000419 1.82 44400.96 8646.50 mach_5. 20046.07 FEMA 02 81000.00 35.02 63.15 48.08 53.00 0.000312 1.60 40224.51 8887.40 mach_5. 20046.27 FEMA 01 81000.00 35.09 53.20 48.71 53.34 0.000312 1.60 40224.51 8887.40 mach_5. 20046.27 FEMA 01 81000.00 35.09 53.20 48.71 53.34 0.000312 1.60 40224.51 8887.40 mach_5. 20046.27 FEMA 01 81000.00 35.07 53.20 48.71 43.00 53.52 63.00 60.0049 1.60 4200.37 6867.60 mach_5. 20046.27 FEMA 01 81000.00 35.07 53.47 43.00 53.52 63.00 60.0049 1.60 4200.37 686.67 mach_5. 20046.28 FEMA 01 81000.00 35.07 53.47 43.00 53.52 60.0049 1.60 4200.37 686.67 mach_5. 21912.55 FEMA 01 81000.00 35.07 53.47 43.00 53.52 60.0049 1.60 4200.37 686.67 mach_5. 21912.55 FEMA 01 81000.00 35.00 53.00 53.00 53.54 60.00070 1.60 4000.37 686.07 mach_5. 21912.55 FEMA 01 81000.00 36.00 53.00 53.00 63.54 63.00 63.57 63.00 63.00 mach_5. 21912.55 FEMA 01 81000.00 36.00 53.00 63.00 63.00 63.57 63.00														
mach_5 9991367 FEMA 01-temp 81000.00 38.02 58.30 48.18 \$3.04 0.000316 1.80 44804.02 8852.13	reach_5	19613.67	FEMA	01	81000.00	35.02	53.00	48.18	53.04	0.000316	1.66	48904.11	8852.12	0.12
	reach_5	19613.67	FEMA	02	81000.00	35.02	53.00	48.18	53.04	0.000316	1.66	48904.11	8852.12	0.12
meach_5 20040 60 FEMA 02 61000.00 39.23 53.16 48.68 53.00 0.000491 13.2 4440.08 5849.50 6849.50	reach_5	19613.67	FEMA	01+temp	81000.00	35.02	53.00	48.18	53.04	0.000316	1.66	48904.22	8852.13	0.12
meach_5 20040 60 FEMA 02 61000.00 39.23 53.16 48.68 53.00 0.000491 13.2 4440.08 5849.50 6849.50														
meach_5 20040 FEMA 01+temp 11000.00 30.20 53.15 446.00 53.00 0.000419 1.02 44401.07 6846.51	reach_5	20046.06	FEMA	01	81000.00	36.23	53.15	48.68	53.20	0.000419	1.82	44400.98	8548.50	0.14
reach_5 20084.37 FEMA 01 \$100.00 35.99 \$3.20 48.79 \$3.34 0.000012 1.05 49224.53 8807.89 reach_5 20084.37 FEMA 02 \$100.00 35.99 \$3.20 48.79 \$3.34 0.000012 1.05 49224.53 8807.89 reach_5 20084.37 FEMA 01 \$100.00 35.99 \$3.20 48.62 \$3.34 0.000012 1.05 49224.53 8807.89 reach_5 20084.37 FEMA 01 \$100.00 35.99 \$3.20 48.62 \$3.34 0.000012 1.05 49224.53 8807.89 reach_5 20082.52 FEMA 01 \$100.00 35.00 \$3.47 49.59 \$3.52 0.00049 1.90 42003.70 FEMA 7.00049	reach_5	20046.06	FEMA	02	81000.00	36.23	53.15	48.68	53.20	0.000419	1.82	44400.98	8548.50	
mash	reach_5	20046.06	FEMA	01+temp	81000.00	36.23	53.15	48.68	53.20	0.000419	1.82	44401.07	8548.51	0.14
mash														
mach, 5, 20824.37 FEMA 01+6mp 81000.00 35.99 53.24 48.62 53.34 0.000312 1.65 49224.62 8887.89 mach, 5, 20862.62 FEMA 02 81000.00 36.07 53.47 49.69 53.52 0.000499 1.90 4.2003.70 8789.97 mach, 5, 20862.62 FEMA 02 81000.00 36.07 53.47 49.69 53.52 0.000490 1.90 4.2003.70 8789.97 mach, 5, 20862.62 FEMA 01 81000.00 36.07 53.47 49.69 53.52 0.000490 1.90 4.2003.70 8789.97 mach, 5, 21312.55 FEMA 01 81000.00 36.08 63.68 49.99 53.74 0.000521 1.95 41502.69 6462.57 mach, 5, 21312.55 FEMA 01 81000.00 36.08 63.68 49.99 53.74 0.000521 1.95 41502.69 6462.57 mach, 5, 21312.55 FEMA 02 81000.00 36.08 63.68 49.99 53.74 0.000521 1.95 41502.69 6462.57 mach, 5, 21312.55 FEMA 02 81000.00 36.08 53.88 49.99 53.74 0.000521 1.95 41502.69 6462.57 mach, 5, 21312.55 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.16 37167.66 6801.73 mach, 5, 21306.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.16 37167.66 6801.73 mach, 5, 21306.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.16 37167.66 6801.73 mach, 5, 21317.71 FEMA 02 81000.00 36.17 54.22 59.39 54.29 0.000769 2.22 30448.29 8225.62 mach, 5, 22316.73 FEMA 01 81000.00 36.17 54.22 59.39 54.29 0.000769 2.22 30448.20 8225.62 mach, 5, 22316.73 FEMA 01 81000.00 36.17 54.22 59.39 54.29 0.000769 2.22 30448.20 8225.62 mach, 5, 22316.75 FEMA 01 81000.00 36.17 54.22 59.39 54.29 0.000769 2.29 33389.90 8344.19 mach, 5, 22376.77 FEMA 01 81000.00 36.17 54.22 59.39 54.29 0.000769 2.29 33389.90 8344.19 mach, 5, 22366.75 FEMA 01 81000.00 36.17 54.22 59.39 54.29 0.000779 2.22 30448.20 8225.62 mach, 5, 22366.75 FEMA 01 81000.00 36.17 54.22 59.39 54.29 0.000779		+			_									0.12
mesch 5 20882.62 FEMA				1										0.12
mach 5 20882.62 FEMA 02 81000.00 36.07 53.47 49.69 53.52 0.000499 1.90 42033.80 878.97 mach 5 20862.62 FEMA 01 81000.00 36.07 53.47 49.69 53.52 0.000499 1.90 42033.80 878.97 mach 5 21312.55 FEMA 01 81000.00 36.08 53.88 49.93 53.74 0.000521 1.95 41502.69 8492.57 mach 5 21312.55 FEMA 02 81000.00 36.08 53.88 49.93 53.74 0.000521 1.95 41502.69 8492.57 mach 5 21312.55 FEMA 01 81000.00 36.08 53.88 49.93 53.74 0.000521 1.95 41502.69 8492.57 mach 5 21706.73 FEMA 01 81000.00 36.08 53.68 49.93 53.74 0.000521 1.95 41502.69 8492.57 mach 5 21706.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21706.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21706.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21707.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21707.71 FEMA 01 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21707.71 FEMA 01 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.26 8225.82 mach 5 22707.77 FEMA 02 81000.00 38.77 54.22 50.39 54.29 0.000749 2.22 36448.26 8225.82 mach 5 2270.67 FEMA 01 81000.00 38.77 54.22 50.39 54.29 0.000749 2.22 36448.26 8225.82 mach 5 2470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000879 2.22 36448.26 8225.82 mach 5 2470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000879 2.22 36448.26 8225.82 mach 5 2470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000879 2.22 36448.26 8225.82 mach 5 2470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000879 2.29 35380.80 8344.19 mach 5 2266.00 90.0	reach_5	20424.37	FEMA	01+temp	81000.00	35.99	53.29	48.62	53.34	0.000312	1.65	49224.62	8857.89	0.12
mach 5 20882.62 FEMA 02 81000.00 36.07 53.47 49.69 53.52 0.000499 1.90 42033.80 878.97 mach 5 20862.62 FEMA 01 81000.00 36.07 53.47 49.69 53.52 0.000499 1.90 42033.80 878.97 mach 5 21312.55 FEMA 01 81000.00 36.08 53.88 49.93 53.74 0.000521 1.95 41502.69 8492.57 mach 5 21312.55 FEMA 02 81000.00 36.08 53.88 49.93 53.74 0.000521 1.95 41502.69 8492.57 mach 5 21312.55 FEMA 01 81000.00 36.08 53.88 49.93 53.74 0.000521 1.95 41502.69 8492.57 mach 5 21706.73 FEMA 01 81000.00 36.08 53.68 49.93 53.74 0.000521 1.95 41502.69 8492.57 mach 5 21706.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21706.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21706.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21707.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21707.71 FEMA 01 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8601.73 mach 5 21707.71 FEMA 01 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.26 8225.82 mach 5 22707.77 FEMA 02 81000.00 38.77 54.22 50.39 54.29 0.000749 2.22 36448.26 8225.82 mach 5 2270.67 FEMA 01 81000.00 38.77 54.22 50.39 54.29 0.000749 2.22 36448.26 8225.82 mach 5 2470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000879 2.22 36448.26 8225.82 mach 5 2470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000879 2.22 36448.26 8225.82 mach 5 2470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000879 2.22 36448.26 8225.82 mach 5 2470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000879 2.29 35380.80 8344.19 mach 5 2266.00 90.0		00000	FEA	04	0.000	a		,		0.00		/nnc	070	
mash														0.15
reach 5 21312.55 FEMA 01 81000.00 36.06 53.68 46.93 53.74 0.000521 1.95 41502.69 6402.57 reach 5 21312.55 FEMA 02 81000.00 36.06 53.68 46.93 53.74 0.000521 1.95 41502.69 6402.57 reach 5 21312.55 FEMA 01 181000.00 36.06 53.68 46.93 53.74 0.000521 1.95 41502.69 6402.57 reach 5 21312.55 FEMA 01 181000.00 36.06 53.68 46.93 53.74 0.000521 1.95 41502.69 6402.57 reach 5 21306.73 FEMA 01 81000.00 34.91 53.91 50.27 53.99 0.000765 2.16 37167.68 6601.73 reach 5 21706.73 FEMA 02 81000.00 34.91 53.91 50.27 53.99 0.000765 2.16 37167.68 6601.73 reach 5 21706.73 FEMA 01 81000.00 34.91 53.91 50.26 53.99 0.000765 2.16 37167.68 6601.73 reach 5 21717.71 FEMA 01 81000.00 34.91 53.91 50.26 53.99 0.000765 2.18 37167.68 6601.73 reach 5 21717.71 FEMA 01 81000.00 36.17 54.22 56.39 54.29 0.000749 2.22 38448.28 6225.82 reach 5 21717.71 FEMA 01 81000.00 36.17 54.22 56.39 54.29 0.000749 2.22 38448.28 6225.82 reach 5 2217.71 FEMA 01 81000.00 36.17 54.22 56.39 54.29 0.000749 2.22 38448.28 6225.82 reach 5 2217.71 FEMA 01 81000.00 36.17 54.22 56.39 54.29 0.000749 2.22 38448.28 6225.82 reach 5 2217.67 FEMA 01 81000.00 36.14 54.50 56.55 54.59 0.000870 2.29 35380.90 8344.19 reach 5 22470.67 FEMA 01 81000.00 36.14 54.50 56.55 54.59 0.000870 2.29 35380.90 8344.19 reach 5 22470.67 FEMA 01 81000.00 36.14 54.50 56.55 54.59 0.000870 2.29 35380.90 8344.19 reach 5 22470.67 FEMA 01 81000.00 36.62 54.87 51.18 54.96 0.000707 2.24 36328.31 844.19 reach 5 22470.67 FEMA 01 81000.00 36.02 56.20 56.71 56.42 0.001743 2.24 36238.14 54.50 56.55 54.59 0.000870 2.29 35380.90 8344.19 reach 5 22606.19 FEMA 01 81000.00 36.02 56.20 56.71 56.42 0.001753 2.24 36238.10 844.53 reach 5 22606.19 FEMA 01 81000.00 36.02 56.20 56.71 56.42 0.001753 2.24 36238.10 844.53 reach 5 22606.19 FEMA 01 81000.00 36.02 56.20 56.71 56.42 0.001753 2.24 36238.10 844.53 reach 5 23315.78 FEMA 01 81000.00 36.02 56.20 56.71 56.42 0.001753 2.24 36238.10 7754.60 reach 5 23315.78 FEMA 01 81000.00 36.02 56.20 56.79 56.90 56.000877 2.24 36238.10 7754.60 reach 5 2475.34 FEMA 01 81000.00 36.00 56.00 56.00														0.15 0.15
reach, 5 21312.55 FEMA 02 81000.00 38.08 53.68 49.93 53.74 0.000521 1.95 41502.69 849.57 reach, 5 21706.73 FEMA 01 18100.00 38.08 55.68 49.94 53.74 0.000521 1.95 41502.69 8492.57 reach, 5 21706.73 FEMA 01 81000.00 34.91 55.91 50.27 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 21706.73 FEMA 02 81000.00 34.91 55.91 50.27 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 21706.73 FEMA 02 81000.00 34.91 55.91 50.27 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 21706.73 FEMA 02 81000.00 34.91 55.91 50.26 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 21711.71 FEMA 01 81000.00 34.91 55.91 50.26 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 22711.71 FEMA 01 81000.00 34.91 55.91 50.26 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 22711.71 FEMA 02 81000.00 38.17 54.22 50.39 54.29 0.000749 2.22 3644.28 8225.82 reach, 5 22470.67 FEMA 01 81000.00 38.17 54.22 50.39 54.29 0.000749 2.22 3644.28 8225.82 reach, 5 2470.67 FEMA 01 81000.00 38.17 54.22 50.39 54.29 0.000749 2.22 3644.28 8225.82 reach, 5 2470.67 FEMA 01 81000.00 38.14 56.50 50.55 54.99 0.000870 2.29 35380.00 8844.19 reach, 5 22670.67 FEMA 01 81000.00 38.14 56.50 50.55 54.99 0.000870 2.29 35380.00 8844.19 reach, 5 2268.01 FEMA 01 81000.00 38.02 56.87 51.18 54.95 0.000870 2.29 35380.00 8844.19 reach, 5 2268.01 FEMA 02 81000.00 38.02 56.87 51.18 54.95 0.000870 2.29 35380.00 8844.19 reach, 5 2268.01 FEMA 02 81000.00 38.02 56.29 52.71 55.42 0.000767 2.24 36238.10 8494.53 reach, 5 2268.01 FEMA 02 81000.00 38.02 56.29 52.71 55.42 0.000767 2.24 36238.10 8494.53 reach, 5 2268.01 FEMA 02 81000.00 38.02 56.29 52.71 55.42 0.000767 2.24 36238.10 8494.53 reach, 5 23787.47 FEMA 01 81000.00 38.02 56.59 52.59 52.71 55.42 0.001753 2.91 2784.264 7754.60 reach, 5 23787.47 FEMA 01 81000.00 38.02 56.59 52.59 52.71 55.42 0.001753 2.91 2784.264 7754.60 reach, 5 23787.47 FEMA 01 81000.00 38.02 56.59 5.59 5.71 55.42 0.001753 2.91 2784.264 7754.60 reach, 5 23787.47 FEMA 01 81000.00 38.05 56.59 5.51 5.51 56.00 0.00077 2.24 33265.28 8054.98 reach, 5 23787.47 FEMA 01 81000.00 38.79 56.56 59.71 56.54 0.000	reacri_5	20092.02	PEIVIA	U1+temp	61000.00	30.07	53.47	49.68	53.52	0.000499	1.90	42003.80	0/88.9/	0.15
reach, 5 21312.55 FEMA 02 81000.00 38.08 53.68 49.93 53.74 0.000521 1.95 41502.69 849.57 reach, 5 21706.73 FEMA 01 18100.00 38.08 55.68 49.94 53.74 0.000521 1.95 41502.69 8492.57 reach, 5 21706.73 FEMA 01 81000.00 34.91 55.91 50.27 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 21706.73 FEMA 02 81000.00 34.91 55.91 50.27 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 21706.73 FEMA 02 81000.00 34.91 55.91 50.27 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 21706.73 FEMA 02 81000.00 34.91 55.91 50.26 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 21711.71 FEMA 01 81000.00 34.91 55.91 50.26 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 22711.71 FEMA 01 81000.00 34.91 55.91 50.26 53.99 0.00076 2.18 37167.66 8601.73 reach, 5 22711.71 FEMA 02 81000.00 38.17 54.22 50.39 54.29 0.000749 2.22 3644.28 8225.82 reach, 5 22470.67 FEMA 01 81000.00 38.17 54.22 50.39 54.29 0.000749 2.22 3644.28 8225.82 reach, 5 2470.67 FEMA 01 81000.00 38.17 54.22 50.39 54.29 0.000749 2.22 3644.28 8225.82 reach, 5 2470.67 FEMA 01 81000.00 38.14 56.50 50.55 54.99 0.000870 2.29 35380.00 8844.19 reach, 5 22670.67 FEMA 01 81000.00 38.14 56.50 50.55 54.99 0.000870 2.29 35380.00 8844.19 reach, 5 2268.01 FEMA 01 81000.00 38.02 56.87 51.18 54.95 0.000870 2.29 35380.00 8844.19 reach, 5 2268.01 FEMA 02 81000.00 38.02 56.87 51.18 54.95 0.000870 2.29 35380.00 8844.19 reach, 5 2268.01 FEMA 02 81000.00 38.02 56.29 52.71 55.42 0.000767 2.24 36238.10 8494.53 reach, 5 2268.01 FEMA 02 81000.00 38.02 56.29 52.71 55.42 0.000767 2.24 36238.10 8494.53 reach, 5 2268.01 FEMA 02 81000.00 38.02 56.29 52.71 55.42 0.000767 2.24 36238.10 8494.53 reach, 5 23787.47 FEMA 01 81000.00 38.02 56.59 52.59 52.71 55.42 0.001753 2.91 2784.264 7754.60 reach, 5 23787.47 FEMA 01 81000.00 38.02 56.59 52.59 52.71 55.42 0.001753 2.91 2784.264 7754.60 reach, 5 23787.47 FEMA 01 81000.00 38.02 56.59 5.59 5.71 55.42 0.001753 2.91 2784.264 7754.60 reach, 5 23787.47 FEMA 01 81000.00 38.05 56.59 5.51 5.51 56.00 0.00077 2.24 33265.28 8054.98 reach, 5 23787.47 FEMA 01 81000.00 38.79 56.56 59.71 56.54 0.000	reach 5	21312 55	EEMA	01	81000 00	36.08	53.68	10.03	53.74	0.000521	1.05	41502.60	8402 57	0.16
														0.16
reach, 5 27706.73 FEMA 01 8100.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 801.73 reach, 5 27706.73 FEMA 02 8100.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 801.73 reach, 5 27706.73 FEMA 01+temp 8100.00 34.91 53.91 50.26 53.99 0.000765 2.18 37167.66 801.73 reach, 5 2711.71 FEMA 01 8100.00 34.91 53.91 50.26 53.99 0.000765 2.18 37167.66 801.73 reach, 5 2711.71 FEMA 01 8100.00 34.91 53.91 50.26 53.99 0.000749 2.22 3464.28 8225.82 reach, 5 2711.71 FEMA 01 8100.00 36.17 54.22 50.33 54.29 0.000749 2.22 3464.28 8225.82 reach, 5 22711.71 FEMA 02 8100.00 36.17 54.22 50.33 54.29 0.000749 2.22 3464.28 8225.82 reach, 5 2470.67 FEMA 01+temp 8100.00 36.17 54.22 50.33 54.29 0.000749 2.22 3464.28 8225.82 reach, 5 2470.67 FEMA 02 8100.00 35.14 54.50 50.55 54.59 0.000779 2.20 35380.00 8344.19 reach, 5 2470.67 FEMA 02 8100.00 35.14 54.50 50.55 54.59 0.000770 2.20 35380.00 8344.19 reach, 5 22908.19 FEMA 01 8100.00 35.14 54.50 50.55 54.89 0.000770 2.20 35380.00 8344.19 reach, 5 22908.19 FEMA 01 8100.00 35.62 54.87 51.18 54.50 50.000770 2.20 35380.00 8344.19 reach, 5 22908.19 FEMA 01 8100.00 35.62 54.87 51.18 54.55 0.000777 2.24 36238.10 8484.53 reach, 5 22908.19 FEMA 01 8100.00 35.62 54.87 51.18 54.55 0.000777 2.24 36238.10 8484.53 reach, 5 22908.19 FEMA 01 8100.00 35.62 54.87 51.18 54.55 0.000777 2.24 36238.10 8484.53 reach, 5 22908.19 FEMA 01 8100.00 35.62 54.87 51.18 54.55 0.000777 2.24 36238.10 8484.53 reach, 5 23915.78 FEMA 01+temp 8100.00 35.62 54.87 51.18 54.65 0.000777 2.24 36238.10 8484.53 reach, 5 23915.78 FEMA 01+temp 8100.00 35.62 55.29 52.71 55.42 0.001753 2.91 2784.24 7754.60 reach, 5 23767.47 FEMA 01+temp 8100.00 35.60 55.94 51.91 56.42 0.001753 2.91 2784.24 7754.60 reach, 5 23767.47 FEMA 01+temp 8100.00 35.60 55.94 51.91 56.43 0.000777 2.44 33262.88 8054.99 reach, 5 23767.47 FEMA 01+temp 8100.00 35.00 55.94 51.91 56.43 0.000777 2.44 33262.88 8054.99 reach, 5 23767.47 FEMA 01+temp 8100.00 36.00 55.94 51.91 56.00 0.000777 2.44 33262.88 8054.99 reach, 5 23767.47 FEMA 01+temp 8100.00 37.99 56.56 52.41 56.65														0.16
reach_5 27706.73 FEMA 01 of 1-femp 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8801.73 reach_5 2710.73 FEMA 01 of 1-femp 81000.00 36.17 53.91 50.26 53.99 0.000765 2.18 37167.60 8801.73 reach_5 2711.71 FEMA 01 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.28 8225.82 reach_5 2711.71 FEMA 01 elemp 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.28 8225.82 reach_5 2711.71 FEMA 01-femp 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.28 8225.82 reach_5 2711.71 FEMA 01-femp 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.28 8225.82 reach_5 22470.67 FEMA 01-femp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 2296.19 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 2296.19 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 23915.78 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000767 2.24 36238.10 8444.55 reach_5 23915.78 FEMA 01-femp 81000.00 36.02 55.29 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.29 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.29 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.29 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.90 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.90 55.94 51.91 56.03 0.000077 2.44 33262.88 8054.99 reach_5 23757.47 FEMA 01-femp 81000.00 36.02 55.90 55.94 51.91 56.0	rodon_o	2.10.12.00		o i · tomp	0.000.00	00.00	00.00	10.01	00.11	0.000021	1.00	11002.00	0.102.07	0.10
reach_5 27706.73 FEMA 01 of 1-femp 81000.00 34.91 53.91 50.27 53.99 0.000765 2.18 37167.66 8801.73 reach_5 2710.73 FEMA 01 of 1-femp 81000.00 36.17 53.91 50.26 53.99 0.000765 2.18 37167.60 8801.73 reach_5 2711.71 FEMA 01 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.28 8225.82 reach_5 2711.71 FEMA 01 elemp 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.28 8225.82 reach_5 2711.71 FEMA 01-femp 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.28 8225.82 reach_5 2711.71 FEMA 01-femp 81000.00 36.17 54.22 50.39 54.29 0.000749 2.22 36448.28 8225.82 reach_5 22470.67 FEMA 01-femp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 22470.67 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 2296.19 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 2296.19 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 36380.90 8344.19 reach_5 23915.78 FEMA 01-femp 81000.00 35.62 54.87 51.18 54.95 0.000767 2.24 36238.10 8444.55 reach_5 23915.78 FEMA 01-femp 81000.00 36.02 55.29 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.29 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.29 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.29 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.90 52.71 55.42 0.001763 2.21 2746.264 7754.60 reach_5 23315.78 FEMA 01-femp 81000.00 36.02 55.90 55.94 51.91 56.03 0.000077 2.44 33262.88 8054.99 reach_5 23757.47 FEMA 01-femp 81000.00 36.02 55.90 55.94 51.91 56.0	reach 5	21706.73	FEMA	01	81000.00	34.91	53.91	50.27	53.99	0.000765	2.18	37167.66	8601.73	0.18
reach, 5	reach 5	21706.73	FEMA	02	81000.00	34.91	53.91	50.27	53.99	0.000765	2.18	37167.66	8601.73	0.18
reach_5	reach_5	21706.73	FEMA	01+temp	81000.00	34.91	53.91	50.26	53.99	0.000765	2.18	37167.70	8601.73	0.18
reach_5														
reach_5 22111.71 FEMA 01+lemp 8100.00 36.17 54.22 50.39 54.29 0.000749 2.22 36446.31 8225.82 reach_6 22470.67 FEMA 01 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 35380.90 8344.19 reach_5 22470.67 FEMA 01+lemp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 35380.90 8344.19 reach_5 22506.19 FEMA 01+lemp 81000.00 35.62 54.87 51.18 54.95 0.000870 2.29 35380.39 8344.19 reach_5 22908.19 FEMA 01 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 reach_5 22908.19 FEMA 01+lemp 81000.00 36.02 55.87 51.81 54.95 0.000787 2.24 36238.10 8484.53 reach_5 23315	reach_5	22111.71	FEMA	01	81000.00	36.17	54.22	50.39	54.29	0.000749	2.22	36448.28	8225.82	0.19
reach_5	reach_5	22111.71	FEMA	02				50.39						0.19
reach_5 22470.67 FEMA 02 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 35380.90 8344.19 reach_5 22470.67 FEMA 01+temp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 35380.93 8344.19 reach_5 22908.19 FEMA 01 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 reach_5 22908.19 FEMA 01+temp 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 reach_5 22908.19 FEMA 01+temp 81000.00 36.02 55.29 52.71 55.42 0.000787 2.24 36238.10 8484.53 reach_5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 2784.264 77754.60 reach_5 23787.47	reach_5	22111.71	FEMA	01+temp	81000.00	36.17	54.22	50.39	54.29	0.000749	2.22	36448.31	8225.82	0.19
reach_5 22470.67 FEMA 02 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 35380.90 8344.19 reach_5 22470.67 FEMA 01+temp 81000.00 35.14 54.50 50.55 54.59 0.000870 2.29 35380.93 8344.19 reach_5 22908.19 FEMA 01 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 reach_5 22908.19 FEMA 01+temp 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 reach_5 22908.19 FEMA 01+temp 81000.00 36.02 55.29 52.71 55.42 0.000787 2.24 36238.10 8484.53 reach_5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 2784.264 77754.60 reach_5 23787.47														
reach_5 22470.67 FEMA 01+temp 81000.00 35.14 54.50 50.56 54.59 0.000870 2.29 35380.93 8344.19 reach_5 22908.19 FEMA 01 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 reach_5 22908.19 FEMA 02 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 reach_5 22908.19 FEMA 01+temp 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 reach_5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 2784.264 7754.60 reach_5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 2784.264 7754.60 reach_5 23787.47														0.20
Reach_5 22908.19 FEMA 01 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 Reach_5 22908.19 FEMA 02 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 Reach_5 22908.19 FEMA 01 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.10 8484.53 Reach_5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 Reach_5 23315.78 FEMA 02 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 Reach_5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 Reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 Reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 Reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 Reach_5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 Reach_5 24475.34 FEMA 02 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 Reach_5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 Reach_5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 Reach_5 24908.97 FEMA 01 81000.00 37.69 57.39 53.36 57.49 0.000948 2.51 32361.39 7660.37 Reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.36 57.49 0.000948 2.51 32361.39 7660.37 Reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.36 57.49 0.000948 2.51 32361.39 7660.37 Reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.36 57.49 0.000948 2.51 32361.39 7660.37 Reach_5 25305.01 FEMA 01 81000.00 37.69 57.				-										
reach 5 22908.19 FEMA 02 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.14 8484.53 reach 5 22908.19 FEMA 01+lemp 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.14 8484.53 reach 5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach 5 23315.78 FEMA 01+lemp 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach 5 23315.78 FEMA 01+lemp 81000.00 36.50 55.94 51.91 56.03 0.00977 2.44 33262.88 8054.98 reach 5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.00977 2.44 33262.88 8054.98 reach 5 23787.47 <td>reach_5</td> <td>22470.67</td> <td>FEMA</td> <td>U1+temp</td> <td>81000.00</td> <td>35.14</td> <td>54.50</td> <td>50.55</td> <td>54.59</td> <td>0.000870</td> <td>2.29</td> <td>35380.93</td> <td>8344.19</td> <td>0.20</td>	reach_5	22470.67	FEMA	U1+temp	81000.00	35.14	54.50	50.55	54.59	0.000870	2.29	35380.93	8344.19	0.20
reach 5 22908.19 FEMA 02 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.14 8484.53 reach 5 22908.19 FEMA 01+lemp 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.14 8484.53 reach 5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach 5 23315.78 FEMA 01+lemp 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach 5 23315.78 FEMA 01+lemp 81000.00 36.50 55.94 51.91 56.03 0.00977 2.44 33262.88 8054.98 reach 5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.00977 2.44 33262.88 8054.98 reach 5 23787.47 <td>reach F</td> <td>22000 10</td> <td>FEMA</td> <td>04</td> <td>84000.00</td> <td>25.62</td> <td>54.07</td> <td>E4 40</td> <td>E4.0E</td> <td>0.000707</td> <td>2.24</td> <td>26220.40</td> <td>0404.52</td> <td>0.10</td>	reach F	22000 10	FEMA	04	84000.00	25.62	54.07	E4 40	E4.0E	0.000707	2.24	26220.40	0404.52	0.10
reach_5 22908.19 FEMA 01+lemp 81000.00 35.62 54.87 51.18 54.95 0.000787 2.24 36238.14 8484.53 reach_5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23315.78 FEMA 02 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23315.78 FEMA 01+lemp 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.00977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.00977 2.44 33262.88 8054.98 reach_5 24475.34														0.19 0.19
reach_5 23315.78 FEMA 01 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23315.78 FEMA 01+lemp 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23315.78 FEMA 01+lemp 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 02 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 01 81000.00 37.99 56.56 59.44 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5		+												0.19
reach_5 23315.78 FEMA 02 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23315.78 FEMA 01+temp 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 01+temp 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.03 0.000977 2.44 33262.88 8054.98 reach_5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24475.34<	Teach_5	22300.13	I LIVIA	OTTEMP	01000.00	33.02	34.07	31.10	54.55	0.000707	2.24	30230.14	0404.00	0.19
reach_5 23315.78 FEMA 02 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23315.78 FEMA 01+temp 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 01+temp 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.03 0.000977 2.44 33262.88 8054.98 reach_5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24475.34<	reach 5	23315.78	FEMA	01	81000.00	36.02	55.29	52.71	55.42	0.001753	2.91	27842.64	7754.60	0.27
reach 5 23315.78 FEMA 01+temp 81000.00 36.02 55.29 52.71 55.42 0.001753 2.91 27842.64 7754.60 reach 5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach 5 23787.47 FEMA 01-temp 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach 5 23787.47 FEMA 01-temp 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach 5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach 5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach 5 24908.97<														0.27
reach_5 23787.47 FEMA 01 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 02 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 01 + lemp 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach_5 23787.47 FEMA 01 + lemp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24475.34 FEMA 01 + lemp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 249														0.27
reach 5 23787.47 FEMA 02 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach 5 23787.47 FEMA 01+temp 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach 5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach 5 24475.34 FEMA 02 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach 5 24475.34 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach 5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach 5 24908.97	_													
reach 5 23787.47 FEMA 01+temp 81000.00 36.50 55.94 51.91 56.03 0.000977 2.44 33262.88 8054.98 reach 5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach 5 24475.34 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach 5 24475.34 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach 5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach 5 24908.97 FEMA 01+temp 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach 5 2530	reach_5	23787.47	FEMA	01	81000.00	36.50	55.94	51.91	56.03	0.000977	2.44	33262.88	8054.98	0.21
reach_5 24475.34 FEMA 01 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24475.34 FEMA 02 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24475.34 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30599.27 7594.69 reach_5 24908.97 FEMA 02 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 3059.27 7594.69 reach_5 24908.97 FEMA 01+temp 81000.00 37.69 57.39 53.35 57.49 0.001153 2.66 30569.27 7594.69 reach_5 25305.01	reach_5													0.21
reach_6 24475.34 FEMA 02 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24475.34 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 02 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 01+temp 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01	reach_5	23787.47	FEMA	01+temp	81000.00	36.50	55.94	51.91	56.03	0.000977	2.44	33262.88	8054.98	0.21
reach_6 24475.34 FEMA 02 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24475.34 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 02 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 01+temp 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01														
reach_5 24475.34 FEMA 01+temp 81000.00 37.99 56.56 52.41 56.65 0.000823 2.36 34346.89 7619.93 reach_5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 02 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 01+temp 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 01+temp 81000.00 37.69 57.39 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25756.87<				-	_									
reach_5 24908.97 FEMA 01 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 02 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 01+temp 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 01 +temp 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 02 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 01+temp 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25756.87														
reach_5 24908.97 FEMA 02 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 01+temp 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 02 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 01+temp 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25756.87 FEMA 01 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87	reach_5	24475.34	FEMA	01+temp	81000.00	37.99	56.56	52.41	56.65	0.000823	2.36	34346.89	7619.93	0.19
reach_5 24908.97 FEMA 02 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 24908.97 FEMA 01+temp 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 02 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 01+temp 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25756.87 FEMA 01 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87		04000.07	FENA	04	04000 00	00.70	50.07	50.40	57.00	0.004450	0.00	00500 07	7504.00	0.00
reach_5 24908.97 FEMA 01+temp 81000.00 36.73 56.97 53.16 57.08 0.001153 2.66 30569.27 7594.69 reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 02 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 01+temp 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25756.87 FEMA 01 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87<														
reach_5 25305.01 FEMA 01 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 02 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 01+temp 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25756.87 FEMA 01 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 26165.59<				1										
reach_5 25305.01 FEMA 02 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 02 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 2616	Teacii_5	24300.31	I LIVIA	OTTEMP	01000.00	30.73	30.97	33.10	37.00	0.001133	2.00	30309.27	7394.09	0.23
reach_5 25305.01 FEMA 02 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25305.01 FEMA 01+temp 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25756.87 FEMA 01 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 02 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59<	reach 5	25305.01	FEMA	01	81000 00	37 69	57.39	53.35	57 49	0.000948	2.51	32361 39	7660.37	0.21
reach_5 25305.01 FEMA 01+temp 81000.00 37.69 57.39 53.35 57.49 0.000948 2.51 32361.39 7660.37 reach_5 25756.87 FEMA 01 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 02 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 2616														0.21
reach_5 25756.87 FEMA 01 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 02 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 26165.59 FEMA 01 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59<														0.21
reach_5 25756.87 FEMA 02 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 26165.59 FEMA 01 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 2616					2.500.50	01.00	07.50	55.50	01.10	2.300040	2.51	2_001.00	. 555.57	5.21
reach_5 25756.87 FEMA 02 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 26165.59 FEMA 01 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 2616	reach 5	25756.87	FEMA	01	81000.00	37.88	57.78	53.54	57.88	0.000781	2.49	32589.81	6546.43	0.19
reach_5 25756.87 FEMA 01+temp 81000.00 37.88 57.78 53.54 57.88 0.000781 2.49 32589.81 6546.43 reach_5 26165.59 FEMA 01 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 02 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 38.20 58.32 54.46 58.39 0.000675 2.21 36594.25 7616.65														
reach_5 26165.59 FEMA 01 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 02 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26513.18 FEMA 01 81000.00 38.20 58.32 54.46 58.39 0.000675 2.21 36594.25 7616.65														
reach_5 26165.59 FEMA 02 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26513.18 FEMA 01 81000.00 38.20 58.32 54.46 58.39 0.000675 2.21 36594.25 7616.65														
reach_5 26165.59 FEMA 01+temp 81000.00 37.98 58.08 53.78 58.17 0.000632 2.32 35094.11 7095.18 reach_5 26513.18 FEMA 01 81000.00 38.20 58.32 54.46 58.39 0.000675 2.21 36594.25 7616.65	reach_5	26165.59	FEMA	01	81000.00	37.98	58.08	53.78	58.17	0.000632	2.32	35094.11	7095.18	0.17
reach_5	reach_5	26165.59	FEMA	02	81000.00	37.98	58.08	53.78	58.17	0.000632	2.32	35094.11	7095.18	0.17
	reach_5	26165.59	FEMA	01+temp	81000.00	37.98	58.08	53.78	58.17	0.000632	2.32	35094.11	7095.18	0.17
Ireach 5 126513.18 FEMA														
	reach_5	26513.18	FEMA	02	81000.00	38.20	58.32	54.46	58.39	0.000675	2.21	36594.25	7616.65	0.18

HEC-RAS River: main Reach: reach_5 Profile: FEMA (Continued) No. 19431 - Attachment D - Hydraulic Profile Information

HEC-RAS I	River: main R	leach: reach_5	Profile: FE	MA (Continued) 110. 1	JTJI	/ titao		ווי טו	, uraun	C I IOII		mation
Reach	River Sta	Profile	Plan	Q Total	Min Ch El	W.S. Elev	Crit W.S.	E.G. Elev	E.G. Slope	Vel Chnl	Flow Area	Top Width	Froude # Chl
				(cfs)	(ft)	(ft)	(ft)	(ft)	(ft/ft)	(ft/s)	(sq ft)	(ft)	
reach_5	26513.18	FEMA	01+temp	81000.00	38.20	58.32	54.46	58.39	0.000675	2.21	36594.25	7616.65	0.18
reach_5	26843.62	FEMA	01	81000.00	38.63	58.56	54.92	58.65	0.000893	2.39	33821.42	7791.23	0.20
reach_5	26843.62	FEMA	02	81000.00	38.63		54.92	58.65	0.000893	2.39	33821.42	7791.23	0.20
reach_5	26843.62	FEMA	01+temp	81000.00	38.63	58.56	54.92	58.65	0.000893	2.39	33821.42	7791.23	0.20
reach_5	27176.35	FEMA	01	81000.00	38.94	58.83	54.84	58.91	0.000688	2.24	36148.32	7545.69	0.18
reach_5	27176.35	FEMA	02	81000.00	38.94		54.84	58.91	0.000688	2.24	36148.32	7545.69	0.18
reach_5	27176.35	FEMA	01+temp	81000.00	38.94	58.83	54.84	58.91	0.000688	2.24	36148.32	7545.69	0.18
reach 5	27631.01	FEMA	01	81000.00	39.24	59.12	54.44	59.19	0.000526	2.02	40100.00	7723.15	0.16
reach 5	27631.01	FEMA	02	81000.00	39.24		54.44	59.19	0.000526	2.02	40100.00	7723.15	
reach 5	27631.01	FEMA	01+temp	81000.00	39.24	59.12	54.44	59.19	0.000526	2.02	40100.00	7723.15	
reacri_5	27031.01	I LIVIA	OTTEMP	01000.00	33.24	39.12	34.44	33.13	0.000320	2.02	40100.00	7720.10	0.10
reach 5	27969.09	FEMA	01	81000.00	39.33	59.30	54.89	59.36	0.000491	2.01	40380.77	7745.30	0.15
reach 5	27969.09	FEMA	02	81000.00	39.33	59.30	54.89	59.36	0.000491	2.01	40380.77	7745.30	0.15
reach_5	27969.09	FEMA	01+temp	81000.00	39.33	59.30	54.89	59.36	0.000491	2.01	40380.77	7745.30	0.15
reach_5	28358.25	FEMA	01	81000.00	40.05	59.49	54.98	59.54	0.000434	1.84	44024.39	8450.44	0.14
reach_5	28358.25	FEMA	02	81000.00	40.05	59.49	54.98	59.54	0.000434	1.84	44024.39	8450.44	0.14
reach_5	28358.25	FEMA	01+temp	81000.00	40.05	59.49	54.98	59.54	0.000434	1.84	44024.39	8450.44	0.14
	00700.04	FENAN	04	04000.00	40.00	50.00	55.55	FO 70	0.000000	0.40	07400 57	7040 40	0.40
reach_5	28706.94	FEMA	01	81000.00	40.06		55.55	59.73	0.000688	2.18	37136.57	7948.42	0.18 0.18
reach_5	28706.94 28706.94	FEMA FEMA	-	81000.00 81000.00	40.06 40.06		55.55 55.55	59.73 59.73	0.000688	2.18 2.18	37136.57	7948.42 7948.42	0.18
reach_5	20700.94	FEIVIA	01+temp	81000.00	40.06	59.00	55.55	39.73	0.000666	2.10	37136.57	7940.42	0.16
reach 5	29072.78	FEMA	01	81000.00	40.19	59.93	55.80	60.03	0.000897	2.55	31808.32	6574.93	0.20
reach 5	29072.78	FEMA	02	81000.00	40.19		55.80	60.03	0.000897	2.55	31808.32	6574.93	0.20
reach 5	29072.78	FEMA	01+temp	81000.00	40.19		55.80	60.03	0.000897	2.55	31808.32	6574.93	0.20
rodon_o	20072.70	1 2.11.7	o i r tomp	0.000.00	10.10	00.00	00.00	00.00	0.000001	2.00	01000.02	007 1.00	0.20
reach 5	29473.90	FEMA	01	81000.00	40.70	60.28	56.04	60.39	0.000916	2.70	30046.90	5959.57	0.21
reach 5	29473.90	FEMA	02	81000.00	40.70	60.28	56.04	60.39	0.000916	2.70	30046.90	5959.57	0.21
reach_5	29473.90	FEMA	01+temp	81000.00	40.70	60.28	56.04	60.39	0.000916	2.70	30046.90	5959.57	0.21
reach_5	29894.96	FEMA	01	81000.00	41.00	60.67	56.62	60.79	0.000963	2.83	28628.11	5504.29	0.21
reach_5	29894.96	FEMA	02	81000.00	41.00		56.62	60.79	0.000963	2.83	28628.11	5504.29	
reach_5	29894.96	FEMA	01+temp	81000.00	41.00	60.67	56.62	60.79	0.000963	2.83	28628.11	5504.29	0.21
	00000 05		0.4	04000		04		04 - :	0.004		07000 - :	E450	
reach_5	30303.90	FEMA	01	81000.00	41.81	61.08	57.13	61.21	0.001075	2.97	27308.31	5153.59	
reach_5	30303.90	FEMA	02	81000.00	41.81	61.08	57.13	61.21	0.001075	2.97	27308.31	5153.59	
reach_5	30303.90	FEMA	01+temp	81000.00	41.81	61.08	57.13	61.21	0.001075	2.97	27308.31	5153.59	0.23

Existing Bridge = Short ID 01
Proposed Bridge = Short ID 02
Temporary Bridge = Short ID 01+temp

No. 19431 - Attachment D - Hydraulic Profile Information 30303.90 29072.78 27969.09 26843.62 25756.87 24475.34 22908.19 Cosumnes River Main Channel 2170 20424.37 19146.22 18380.62 17499.39 16691.64 15689.11 14326.09 21706.73 20424.37 Cosumnes River Overflow Channel [3129.82] [11624.10] [10697.89] 5383.082 59922.801